




TACTICAL LINE

From the experience in climbing and rescue, updating since two centuries, here is a complete military line for intervention in any place and situation. Produced with the highest standard quality combined with the most advanced methods of research, KONG items make easier all the operations in which quickness and precision are essential and grant safety and reliability in hostile surroundings.

Since 1830 KONG is producing quality equipment for your safety.

INDEX	
HELMETS	pag. 03
HARNESSES	pag. 06
GLOVES	pag. 17
DESCENDERS	pag. 21
ROPE CLAMPS	pag. 28
PULLEYS	pag. 35
STRETCHERS	pag. 39
FAST ROPE	pag. 46
CARABINERS-CONNECTORS	pag. 57
BAGS	pag. 89
POSITIONING DEVICES	pag. 97

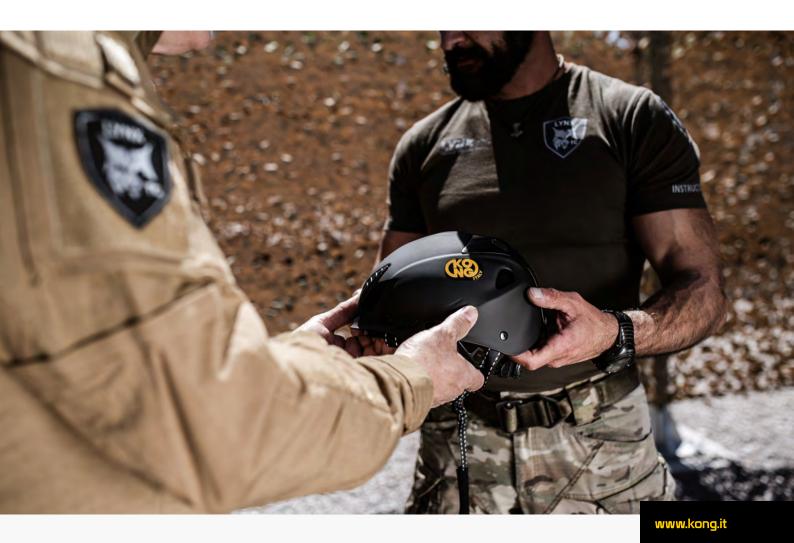

HELMETS

MOUSE TACTICAL





Comfortable and well-ventilated helmet, special version with rubberized black "Soft Touch" finish.

Ultra-durable ABS shell, polyester strap with buckle, and quick size adjustment via the wheel regulation system.

Equipped with marked holes for attaching headphones and visor. Available in the SPORT version certified according to CE EN 12492 and WORK version conform to CE EN 397.

Universal size (52-64 cm).

High quality, completely made in Italy!

* The black color is particularly appreciated for all uses where the equipment must be not very visible (military use, theater and cinema, acrobatic shows, etc ...).

Usage activities

TACTICAL

Item	C € EN	Material	Colour	4i\ (g)	Size	Circumference (cm)
99716GN02KK	EN 12492	ABS	Matte Black	380	UNI	52-64
99718GN02KK	EN 397	ABS	Matte Black	390	UNI	52-64

HELMETS ACCESSORIES

VISOR





Helmet visor resistant to surface damage caused by fine particles and mist. Made of high-quality polycarbonate of Japanese origin.

Extremely robust, it protects from:

- high-speed projection (120 m/s) of particles at room temperature (class B)
- ultraviolet radiation (smoked version only 997.056.F)

The included mounting kit can easily be assembled with Mouse, Spin and Leef helmets thanks to the pre-marked holes in the shell.

Available in transparent and smoked version.

Conform to CE EN 166.

Usage activities

SNOW & ICE	SCAFFOLDING AND TRE	STELS RO	OF A	ND INCLINED PLANES	METAL STRUC	CTURES
ROPE ACCESS	TREECLIMBING / ARBC	RICULTURE	C	CABLEWAY EVACUATION		
FIREBRIGADES	S AND CIVIL PROTECTION	HELIRESC	UE	MOUNTAIN RESCUE	TACTICAL	

Item	C € EN	Material	4À (g)	Size	Colour	Notes
997056P00KK	EN 166:2001	Polycarbonate	80	1	Transparent	Mouse-Spin
997056F00KK	EN 166:2001	Polycarbonate	80	1	Smoked	Mouse-Spin
997056001KK	EN 166:2001	Polycarbonate	80	/	Transparent	Leef
997056F01KK	EN 166:2001	Polycarbonate	80	1	Smoked	Leef

HELMETS ACCESSORIES

MOUSE PLATES





Accessory for fixing headphones (noise reduction or radio), consisting of a pair of sturdy nylon plates that can be fixed using the supplied screws through the holes on the shell of MOUSE helmets.

Snap engagement of the headphones, allows the assembly of most of the headphones on the market. High quality product, made in Italy!

Usage activities

ROPE ACCESS	TREECLIMBING / ARB	ORICULTURE	FIREBRIGADES AND CIVIL PROTECTION
HELIRESCUE	MOUNTAIN RESCUE	TACTICAL	

Item	C€ EN	Material	₫▶ (g)	Size	Colour
997051N00KK	/	Nylon	16	/	Black

TARGET PRO TACTICAL





- Professional harness for operators and rescuers.
- Removable upper part, comfortable, light and breathable.
- Ultra-fast dressing.
- High quality product, made in Italy!
- Tested at 130 kg.
- * The black color is particularly appreciated for all uses where the equipment must be not very visible (military use, theater and cinema, acrobatic shows, etc ...).



NFC READY

Usage activities

TACTICAL

Item	Standards	Material	(g)	Size	Waist size (cm)	Legs size (cm)	Chest size (cm)	Notes
8W9932N00KK	EN 12277/C EN 361 EN 12277/A EN 813		1100	S	60/95	40/60	75/85	Black
8W9933N00KK	EN 12277/C EN 361 EN 12277/A EN 813		1150	M/L	75/110	50/70	86/110	Black
8W9935N00KK	EN 12277/C EN 361 EN 12277/A EN 813		1200	XL	85/130	65/78	86/110	Black

KIT TARGET PRO AERO





The TARGET PRO AERO KIT has been conceived and designed to safely suspend and secure helicopter rescuers during helicopter rescue operations, both inside the aircraft and during winch phases. The kit consists of a harness combined with a life jacket, with the life vest ensuring buoyancy in case of emergency. The life jacket is activated by means of a special self-inflating command through a CO2 cylinder.

JACKET AERO

The Jacket Aero is made of NOMEX® fabric with NOMEX® breathable mesh. The orange borders are made of PU-coated nylon.

A variety of pockets necessary for storing survival and/or operational material can be attached to the Jacket.

Equipped with a pair of removable slings for attaching the Jacket to the harness.

Weight approximately 1.3 kg, buoyancy 200N (20 liters)

TARGET PRO AERO

Rescue and helirescue harness, conceived for those situations where lightness and freedom of movement are essential.

Equipped with automatic buckles on the chest and leg loops for ultra-fast dressing.

All buckles are made of stainless steel AISI 316 to ensure maximum resistance in corrosive and marine environments.

The wide padding on the leg loops guarantees greater comfort during suspension.

The kit is available in 4 sizes: S, M/L, XL, XXL.

Usage activities

TACTICAL

Item	Standards	Material	₫ (g)	Size	Waist size (cm)	Legs size (cm)	Chest size (cm)	Notes
8G0SET001KK	EN 12277/C EN 361 EN 358 EN 12277/A EN 813 EASA CM-CS005	1	2780	S	60/95	40/60	75/85	
8G0SET002KK	EN 12277/C EN 361 EN 358 EN 12277/A EN 813 EASA CM-CS005	1	2830	M/L	75/110	50/70	86/110	
8G0SET003KK	EN 12277/C EN 361 EN 358 EN 12277/A EN 813 EASA CM-CS005	1	2880	XL	85/130	65/78	90/118	
8G0SET004KK	EN 12277/C EN 361 EN 358 EN 12277/A EN 813 EASA CM-CS005	1	2930	XXL	85/130	65/78	100/128	

INDIANA FAST





UNI SIZE HARNESS | FOR MILITARY, LAW ENFORCEMENT AND THE ENTERTAINMENT INDUSTRY

Minimalist harness for military, law enforcement and the entertainment industry.

- Certified to EN12277:2015+A1:2018 Type C and tested to UIAA 105.
- □ Consists of a ventral bridge attachment with 45x63mm span and 16mm protection.
- Waistband with 44mm high tenacity polyester webbing.
- Tapered leg loops with 44mm high tenacity polyester webbing.
- Equipped with 3 automatic buckles on the waist and leg loops that allow full opening for quick donning.
- Colored safety indicator on automatic buckles for visual verification of proper closure.
- Uni size and widely adjustable.
- Thanks to the continuous webbing, the size is adaptable for both adults and children.
- Equipped with NFC chip that allows unique digital identification of the product, in order to simplify the control and the inspection.
- Made in Italy!



Usage activities

TACTICAL

Item	Standards	Material	4≜ (g)	Size	Waist size (cm)	Legs size (cm)	Chest size (cm)	Notes
8C0670N02KK	EN 12277/C UIAA	/	510 g	UNI	60/120 cm	42/66	1	

ROGER





RESCUE HARNESS

Rescue harness, easy to adjust by the four special auto-locking buckles. Fitted with wide, comfortable and breathable paddings, one front belay loop, five gear loops arranged to avoid accidental snagging and a comfortable big rear loop for an easy handling of the operator during the different movement on the machine and on the ground.

High quality product, made in Italy!

Tested at 150 kg (EN 813)



NFC READY

Usage activities

CLIMBING	MOUN	TAINEERING	FIREBRIGADES AND CIVIL PROTECTION	HELIRESCUE
MOUNTAIN R	ESCUE	TACTICAL		

Item	Standards	Material	(g)	Size	Waist size (cm)	Legs size (cm)	Chest size (cm)	Notes
8C9892N00KK	EN 12277/C EN 813	1	595	S	60/95	40/60	1	
8C9893N00KK	EN 12277/C EN 813	/	630	M/L	75/110	50/70	1	
8C9895N00KK	EN 12277/C EN 813	/	670	XL	85/130	65/78	1	

SECURE EIGHT II





Chest harness to be used in combination with a seat harness. Universal size.

Usage activities

FERRATA MOUNTAINEERING ADVENTURE PARKS TACTICAL

Item	Standards	Material	(g)	Size	Waist size (cm)	Legs size (cm)	Chest size (cm)	Notes
8C1020000KK	EN 12277/D		250	UNI	1	1	75/110	/

HARIA





HARNESS FOR RESCUE DOGS

Haria is a harness for rescue, working and police dogs, specially designed for suspension in rough terrain and helicopter activities.

The one size is adjustable by means of innovative buckles that can be opened and easily maneuvered. It adapts to fit the dog breeds used in this canine world with weights up to 50 kg.

The suspension point is clearly visible even in the dark thanks to the reflective tape, it is identified by a special pictogram. When not in use, it can be stored under the specific elastic retaining strap.

On the back there is a comfortable handle for handling the dog. The GPS pocket # 844080N01KK (optional) can also be positioned here.

For ground operations without suspension requirements, using the front part on its own is allowed. For all suspension operations on impassable terrain and/or with a helicopter, the combined use of the front and back part is required. Both parts can be easily connected/disconnected via the automatic buckle.

The GPS pocket was positioned to minimize the possibility of it getting caught in vegetation or rubble. The Velcro closure is to eliminate the possibility of classic zip failures.

Integrated NFC chip with the option of entering personal, dog and/or operator data.

High-visibility color helps you to identify the dog in all scenarios; also available in black.

High quality product, completely designed and made in Italy!



Usage activities

HELIRESCUE	MOUNTAIN RESCUE	TACTICAL	K9

Item	Standards	Material	Size	4≜ (g)	Colour
844080O00KK	1	1	UNI	395	Orange/Black
844080N00KK	1	1	UNI	395	Black
844080N01KK	1	1	/	30	Black

ASSAULT HARNESS 320USN







Yates Tactical lightweight assault harness. Well suited for all rescue, military, SWAT and tactical applications where a Class II harness is utilized. Black webbing with terra contrasting thread.

Quick-adjust waist and leg buckle system for easier entry.

D ring used for the main attachment point.

Weight 680g (1 lb. 8 oz.)

- One size
- Quick leg adjustment with camlockbuckles
- One gear loop
- Meets ASTM/ANSI/OSHA Seat harness standards
- Meets New NSN Rappel Harness Construction criteria
- USN Version UL Classified to meet NFPA 1983/2017 edition standards.

This device is not suitable for private use, and it is specifically designed for use by the armed forces or in the maintenance of law and order.

Usage activities


TACTICAL

Item	NSN Code	Standards	(g)	Size	Colour	Length (cm)	Notes
9Y320USN0YY	4240015800238	1	680	UNI	Black	1	1

SPECIAL FORCES RAPPEL BELT 319C







Unique new concept for a CQB (Close Quarters Battle) belt system that can easily be converted to a rappel or extraction seat harness. Belt portion of the harness can be warned as a standard CQB belt. The waist belt buckle is located on the left of the center to make it easier to accommodate a drop leg or waist holster on the right side of the waist belt. The leg support portion of the harness is easily attached to the belt with *Cobra Quick Connect* buckles. The leg portion is small enough to be stowed in BDU (Battle Dress Uniform) leg pockets. The harness attachment point is well suited for all rappel and extraction situations.

Waist belt portion is now made with "operational camouflage pattern" (OCP) webbing.

Quick release Cobra waist buckle.

Sizes available: M, L, XL

Colour available: OCP/terra.

Meets ASTM F1772 Seat Harness Standards

This device is not suitable for private use, and it is specifically designed for use by the armed forces or in the maintenance of law and order.

Usage activities

TACTICAL

It	em	NSN Code	Standards	(g)	Size	Colour	Length (cm)	Notes
9Y319	C003YY	1	1	1	M	Terra	1	1
9Y319	C004YY	1	1	1	L	Terra	/	1
9Y319	C005YY	1	/	1	XL	Terra	1	/

RESCUE HARNESS 310







Yates Tactical well suited rescue harness for military, special forces and tactical rappel applications where a metal attachment point is not necessary. The anatomical configuration of the harness has made it the choice for many tactical teams who need a non-restrictive harness system. The front attachment point is provided through slot webbing construction. Weight 539g (1 lb. 3 oz.).

- One size, fully adjustable
- Colour: Terra
- · Quick leg adjustment with camlock buckles
- One gear loop
- Meets ASTM F1772 Seat Harness Standards

This device is not suitable for private use, and it is specifically designed for use by the armed forces or in the maintenance of law and order.

Usage activities

TACTICAL

Item	NSN Code	Standards	(g)	Size	Colour	Length (cm)	Notes
9Y310T000YY	1	/	539	UNI	Terra	1	1

SPECIAL FORCES RAPPEL BELT 319CPJ







Unique new concept for a CQB (Close Quarters Battle) belt system that can easily be converted to a rappel or extraction seat harness. Belt portion of the harness can be warned as a standard CQB belt. The waist belt buckle is located on the left of the center to make it easier to accommodate a drop leg or waist holster on the right side of the waist belt. The leg support portion of the harness is easily attached to the belt with *Cobra Quick Connect* buckles. The leg portion is small enough to be stowed in BDU (Battle Dress Uniform) leg pockets. The harness attachment point is well suited for all rappel and extraction situations.

Quick release Cobra waist buckle and Cobra Leg Buckles.

Available in right or left-hand waist buckle versions.

Waist belt portion is now made with "operational camouflage pattern" (OCP) webbing.

Sizes available: M, L

Colour available: OCP/Terra.

Meets ASTM F1772 Seat Harness Standards

This device is not suitable for private use, and it is specifically designed for use by the armed forces or in the maintenance of law and order.

Usage activities

TACTICAL

Item	NSN Code	Standards	(g)	Size	Colour	Length (cm)	Notes
9Y319CPJ3YY	1	1	1	М	Terra	1	1
9Y319CPJ4YY	1	/	/	L	Terra	/	/

SPECIAL OPS HARNESS 309







New Yates Tactical harness that utilizes a fully padded structural duty belt which is designed to replace the existing padded duty belt worn by SWAT Officers. Super stiff scuba webbing is sewn to the outside of the belt to facilitate hanging of leg holsters, ammo pouches and gas mask bags. Stiffuba webbing belt attached to inside structural webbing by velcro for easy adjustment and positioning of holsters and pouches. The scuba webbing attachment system is now able to be separated at the rear of the waist belt to easily accommodate slide on holsters and pouches. Velcro and hard pull snaps secure the outer belt portion in position. Cobra Quick ConnectWaist Buckle is now configured to allow the user to have the buckle on the left side or right side of the belt so that it will not interfere with the positioning of the side weapon depending if the user is right or left-handed. Gear loops can now be adjusted to any position along the belt. The leg loop portion of harness can be quickly attached to the belt with a standard locking carabiner (not included). This converts the duty belt portion of the system into a fully functional rappel harness.

Quick leg adjustment with camlock buckles

Meets ASTM/ANSI/OSHA Seat harness standards

Meets ASTM F1772 Seat Harness Standards

5 sizes available: S (68-81cm / 27-32"), M (76-89cm / 30-35"), L (86-99 cm / 34-39"), XL (96-106cm / 38-42")

This device is not suitable for private use, and it is specifically designed for use by the armed forces or in the maintenance of law and order.

Usage activities

TACTICAL

Item	NSN Code	Standards	4i (g)	Size	Colour	Length (cm)	Notes
9Y3090002YY	1	1	/	S	Black	1	1
9Y3090003YY	1	1	/	М	Black	/	1
9Y3090004YY	1	/	/	L	Black	/	1
9Y3090005YY	/	1	/	XL	Black	/	/

GLOVES

FULL GLOVES AERO





REINFORCED | FOR WINCH OPERATORS

Helicopter winch operator gloves, a reinforced version of our FULL GLOVES which keeps the main features.

Made of $DuPont^{TM}$ Kevlar® suede leather on the palm and fingers.

Kevlar® double layer without stitches or seams on the palm to ensure maximum strength while handling the winch cable.

Elastic wrist with velcro closure guarantees an excellent fit.

Breathable and abrasion-resistant Nylon back.

Certified to CE EN 388 and EN 420.

DuPontTM and Kevlar® are trademarks of E.I. Du Pont de Nemours & Company.

Usage activities

HELIRESCUE

TACTICAL

Item	C€ EN	Material	Colour	Weight (g)	Size
95206NNN1KK	EN 388: 2019 EN 420: 2003	Leather/Reinforced with Kevlar®	Black	100	XS
95206NNN2KK	EN 388: 2019 EN 420: 2003	Leather/Reinforced with Kevlar®	Black	105	S
95206NNN4KK	EN 388: 2019 EN 420: 2003	Leather/Reinforced with Kevlar®	Black	110	М
95206NNN6KK	EN 388: 2019 EN 420: 2003	Leather/Reinforced with Kevlar®	Black	115	L
95206NNN7KK	EN 388: 2019 EN 420: 2003	Leather/Reinforced with Kevlar®	Black	120	XL
95206NNN8KK	EN 388: 2019 EN 420: 2003	Leather/Reinforced with Kevlar®	Black	125	XXL

GLOVES

SKIN GLOVES





Lightweight gloves conceived for belay and double rope use, they combine the strength of a work glove with the precision and sensitivity of a thin glove.

Excellent also for use in work and rescue situations.

The double-layered leather protects the most exposed parts of the hand.

The elastic back, made with breathable nylon, is abrasion-resistant and ensures optimum wearability and comfort.

Elastic wrist with Velcro closure.

Made of smooth and soft leather for a perfect balance between strength and sensitivity.

Reinforced thumb and index finger, with special rubber for durability during rope handling.

Available in 4 sizes from S to XL.

Certified to CE EN 388 (4-2-4-3).

Usage activities

FERRATA	MOUN	TAINEERING	ROOF A	AND INCLINED PLANES	METAL STRUCTURES		
ROPE ACCE	SS C	ABLEWAY EVACU	JATION	CONFINED SPACES			
LADDERS A	LADDERS AND ELEVATING PLATFORMS			EBRIGADES AND CIVIL	PROTECTION	HELIRESCUE	
MOUNTAIN	RESCUE	TACTICAL					

Item	C € EN	Material	Colour	Weight (g)	Size
95205N002KK	EN 388: 2019	Leather/Nylon/Rubber	Black	75	S
95205N004KK	EN 388: 2019	Leather/Nylon/Rubber	Black	80	M
95205N006KK	EN 388: 2019	Leather/Nylon/Rubber	Black	85	L
95205N007KK	EN 388: 2019	Leather/Nylon/Rubber	Black	90	XL

GLOVES

FULL GLOVES





High quality suedegloves reinforced with DuPontTM Kevlar® brand fibers on palm and fingers the perfect choice for via ferrata, adventure parks andrescue.

Elastic wrist with Velcro closure ensures a great fit.

The elastic back, made with breathable nylonresists abrasion and ensures the best wearability and confort.

CE certified to EN 388. Available in 5 sizes (\$ M, L, XL, XXL).

DuPontTM and Kevlar® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company.

Usage activities

FERRATA	ADVENTURE PARKS		ROC	ROOF AND INCLINED PLANES			METAL STRUCTURES	
ROPE ACCESS CABLEWAY EVACUATION			JATION	ı	TREECLIN	MBING / ARB	ORICULTURE	
FIREBRIGADES AND CIVIL PROTECTION			ON	HE	LIRESCUE	MOUNTAI	N RESCUE	TACTICAL

Item	C€ EN	Material	Colour	Weight (g)	Size
95203NNN3KK	EN 388: 2019 EN 420: 2003	Leather/Reinforced with Kevlar®	Black	105	S
95203NNN4KK	EN 388: 2019 EN 420: 2003	Leather/Reinforced with Kevlar®	Black	110	М
95203NNN6KK	EN 388: 2019 EN 420: 2003	Leather/Reinforced with Kevlar®	Black	115	L
95203NNN7KK	EN 388: 2019 EN 420: 2003	Leather/Reinforced with Kevlar®	Black	120	XL
95203NNN8KK	EN 388: 2019 EN 420: 2003	Leather/Reinforced with Kevlar®	Black	125	XXL
95203YWF2KK	EN 388: 2019 EN 420: 2003	Leather/Reinforced with Kevlar®	Grey/black/yellow	105	S
95203YWF4KK	EN 388: 2019 EN 420: 2003	Leather/Reinforced with Kevlar®	Grey/black/yellow	110	М
95203YWF6KK	EN 388: 2019 EN 420: 2003	Leather/Reinforced with Kevlar®	Grey/black/yellow	115	L
95203YWF7KK	EN 388: 2019 EN 420: 2003	Leather/Reinforced with Kevlar®	Grey/black/yellow	120	XL
95203YWF8KK	EN 388: 2019 EN 420: 2003	Leather/Reinforced with Kevlar®	Grey/black/yellow	125	XXL

ANCHORAGE

ARO BULL TACTICAL





Heavy load double layer textile anchor sling. It is produced in different lengths and it is perfect for high resistence anchoring. The worn indicator allows an immediate inspection of the product. The different internal colouring allows an immediate inspection and it shows at a glance the status of the product. In addition to the standard dimensions possible, on request, custom lengths. Certifications CE EN795/B - EN354 - Polyamide - Maximum load 35kn - Width 25mm - Weight 52 to 270g depending on the length.

*The black color is particularly appreciated for all uses where the equipment must be not very visible (military use, theater and cinema, acrobatic shows, etc ...).



NFC READY

Usage activities

TACTICAL

Item	C€ EN	Material	4≜ (g)	♦ (kN)	Size	Colour	A (mm)	Hole diameter (mm)
280A120N0KK	EN 795/B EN 354	Polyamide	185	35	120	Black	120 cm	/
280A150N0KK	EN 795/B EN 354	Polyamide	230	35	150	Black	150 cm	1
280A180N0KK	EN 795/B EN 354	Polyamide	270	35	180	Black	180 cm	1
280A030N0KK	EN 795/B EN 354	Polyamide	52	35	30	Black	30 cm	1
280A060N0KK	EN 795/B EN 354	Polyamide	95	35	60	Black	60 cm	1
280A080N0KK	EN 795/B EN 354	Polyamide	130	35	80	Black	80 cm	1

INDY EVO PLUS





Evolution of the well-known Indy Evo descender, fitted with a new lever, easier to handle, that allows more fluid and precise working.

Indy Evo Plus is a manually operated descender device with double autolocking system, that locks both when the lever is released or when it is pressed. Indy Evo Plus is also a descender (conform to EN 12841 type C) for working on rope. It allows descent at a controlled speed, stopping at any time, hands free, on a static rope (EN 1891) or dynamic rope (EN 892). Light weight and compact size, long life guaranteed by the stainless steel cams and low maintenance make it a working tool very appreciated by the industry.

Certified for two people, it allows two people to lower at the same time and also allows the user to take in rope slack.

High quality product, made in Italy!

Usage activities

ROOF AND INCLINED	LINED PLANES		TAL STRUCTURES	ROPE ACCESS	CABLEWAY E	VACUATION
CONFINED SPACES	SAILBOATS		TREECLIMBING	ARBORICULTURE	TACTICAL	

Item	Standards	Material	4 i (g)	Colour	Main dimension (mm)	Minimum rope diameter (mm)	Maximum rope diameter (mm)
801040400KK	EN 341 EN 12841/C	Alu alloy	480	Orange/Black	190	10	12

FULL





FRICTION PLATE | RIGGING PLATE

A belay plate that can be used in many different conditions.

It is a very useful device for rescue operations, the natural choice for mountain experts.

It allows a cleaner belay point, avoiding tricky and cumbersome chains of carabiners and plates.

The wide upper hole is able to accommodate two connectors for higher safety.

When used as a descending device, it works with ropes from 8 to 12mm.

Tested piece by piece.

Usage activities

MOUNTAINEERING	SNOW & ICE	MOUNTAIN RESCUE	TACTICAL
----------------	------------	-----------------	----------

Item	Standards	Material	4i\ (g)	Colour	Main dimension (mm)	Minimum rope diameter (mm)	Maximum rope diameter (mm)
864O15400KK	1	Alu alloy	90	Orange	125	8	12
864N15400KK	1	Alu alloy	90	Black	125	8	12

GI-GI TACTICAL





A real workhorse for Kong!

Multipurpose hot-forged aluminum plate for use with single, double and twin ropes.

Its main applications are self-locking belaying for one or two seconds and abseiling.

The central rib acts as a fulcrum on the connector and allows the recovery of two people, even secured to ropes of different diameter, either simultaneously or separately.

In the case of a fall, only the rope subjected to the fall blocks, leaving the other free to slide.

It is possible to use the GI-GI in combination with a self-locking device and a foot pedal for emergency lifting.

*The black color is particularly appreciated for all uses where the equipment must be not very visible (military use, theater and cinema, acrobatic shows, etc ...).

Usage activities

TACTICAL

Item	Standards	Material	4 i\ (g)	Colour	Main dimension (mm)	Minimum rope diameter (mm)	Maximum rope diameter (mm)
859N00400KK	1	Alu alloy	62	Black	113	8	13

8 CLASSIC TACTICAL





Classic figure of '8' descender. Perfect for belaying the first climber with a half, single and double ropes.

A true workhorse for Kong, which continues to be popular all over the world. It works on ropes from 9 to 12 mm.

*The black color is particularly appreciated for all uses where the equipment must be not very visible (military use, theater and cinema, acrobatic shows, etc ...).

Usage activities

TACTICAL

	Item	Standards	Material	(g)	Colour	Main dimension (mm)	Minimum rope diameter (mm)	Maximum rope diameter (mm)
8050	3N400KK	NIT 271-1 NIT 271-2 EN 15151-2	Alu alloy	110	Black	140	9	12

OKA TACTICAL





Descender especially conceived for canyoning, designed not only for progression on rope but also for use in emergency, recovery and rescue situations which are very difficult to manage with other devices. Quick, safe and effective function in all conditions. The ease of operation, diversity of progression techniques on ropes of different diameters, and the multitude of braking positions are characteristics achieved through its joint development with rescue technicians.

Connector suggested: Large Multiuse Auto Block

Available as a set OKA + Large Multiuse Auto Block connector Supplied with two spare rubber parts.

*The black color is particularly appreciated for all uses where the equipment must be not very visible (military use, theater and cinema, acrobatic shows, etc ...).

Usage activities

TACTICAL

Item	Standards	Material	(g)	Colour	Main dimension (mm)	Minimum rope diameter (mm)	Maximum rope diameter (mm)
80508N400KK	EN 15151-2	Alu allov	100	Black	141	7.8	12.7

BIG 8 TACTICAL





Figure '8' descender with wings for create a locking knot. Perfect for belaying the first climber with double ropes.

The large central opening allows you to overcome any knots on the ropes.

It works on ropes from 9 to 16 mm

*The black color is particularly appreciated for all uses where the equipment must be not very visible (military use, theater and cinema, acrobatic shows, etc ...).

Usage activities

TACTICAL

Item	Standards	Material	(g)	Colour	Main dimension (mm)	Minimum rope diameter (mm)	Maximum rope diameter (mm)
80506N400KK	/	Alu alloy	260	Black	172	9	16

CHUY TACTICAL





The Chuy is a belay and rappel device that works on half, twin and single ropes.

Very light, the user can change the braking capacity thanks to the "V" shape notches, so as to modulate the effort of the user according to their own weight, the rope used, and all those factors that modify friction and consequently the braking.

It gives a smooth feed, strong braking and a great look.

It is recommended for use with HMS screw sleeve connectors.

*The black color is particularly appreciated for all uses where the equipment must be not very visible (military use, theater and cinema, acrobatic shows, etc ...).

Usage activities

TACTICAL

Item	Standards	Material	(g)	Colour	Main dimension (mm)	Minimum rope diameter (mm)	Maximum rope diameter (mm)
940N00400KK	/	Alu allov	55	Black	56	8	12

LIFT TACTICAL





Rope clamp for rope access, available in left and right versions. All the components are part of the latest generation of Kong blockers. Excellent ability to block out particularly on muddy and icy ropes thanks to the holes on the cam and on the side plate. The new material and a special chemical and thermal process give to the cam, in addition to black color, a much higher surface hardness. The result is a great wear resistance and a reduction of the fragility that usually penalizes steels by quenching to low temperatures. New opening lever, ergonomic, easy to handle and protected from shocks and from the risk of accidental opening.

Fitted with anti-overturning system of the cam.

Quality product, made in Italy!

*The black color is particularly appreciated for all uses where the equipment must be not very visible (military use, theater and cinema, acrobatic shows, etc ...).

Usage activities

TACTICAL

	Item	C€ EN	Material	4i\ (g)	Colour	Main dimension (mm)	Minimum rope diameter (mm)	Maximum rope diameter (mm)	Version
8	896NN4D00KK	EN 567 EN 12841/B UIAA	Alu alloy	225	Black	193	8	13	Right
8	896NN4S00KK	EN 567 EN 12841/B UIAA	Alu alloy	225	Black	193	8	13	Left

FUTURA HAND TACTICAL





A revolutionary rope clamp for its extremely tiny dimensions (only 125g) and ergonomic shape. Its small size allows the users hand to sit comfortably inside the device, close to the rope in the same way as you would grabbing the actual rope. Available in right and left versions. The best support to ascend a rope with the "ROPE WALKING SYSTEM" (as if climbing a ladder). After testing the system, cavers confirm an excellent performance and a 30%-efficiency's increase during the ascent.

Fitted with anti-overturning system of the cam.

High quality, made in Italy!

Patented.

* The black color is particularly appreciated for all uses where the equipment must be not very visible (military use, theater and cinema, acrobatic shows, etc ...).

Usage activities

TACTICAL

Item	C€ EN	Material	4i\ (g)	Colour	Main dimension (mm)	Minimum rope diameter (mm)	Maximum rope diameter (mm)	Version	
87600NN4SKK	EN 567 EN 12841/B UIAA	Alu alloy	125	Black	140	8	12	Left	
87600NN4DKK	EN 567 EN 12841/B UIAA	Alu alloy	125	Black	140	8	12	Right	

FUTURA BODY





ULTRA-LIGHT CHEST ROPE CLAMP

Chest ascender, incredibly reduced size and weight, only 80g! Used together with Futura Hand and Futura Foot it's the best support to ascend a rope with the "ROPE WALKING SYSTEM" (as if climbing a ladder). After testing the system, cavers confirm an excellent performance and a 30% efficiency's increase during the ascent.

Fitted with anti-overturning system of the cam.

High quality product, made in Italy!

Usage activities

CLIMBING	MOUNTAINEERING	CAVIN	G	ROPE ACCE	SS	SAILBOA	TS
FIREBRIGAD	ES AND CIVIL PROTECTION	ON MO	TNUC	AIN RESCUE	Т	ACTICAL	

Item	C€ EN	Material	4Å (g)	Colour	Main dimension (mm)	Minimum rope diameter (mm)	Maximum rope diameter (mm)	Version
94200NO00KK	EN 567 EN 12841/B UIAA	Alu alloy	80	Black/Orange	82	9	11	Uni

FUTURA FOOT





Foot ascender that improves and completes the performance of the Futura Hand ascender and the Futura Body chest rope clamp.

Available in right and left versions, equipped with an anti-torsion stirrup.

Fitted with a hole for inserting a carabiner that locks the cam, preventing accidental release of the rope.

Futura System: it's the natural marriage between three devices, the best support to ascend a rope with the "ROPE WALKING SYSTEM" (as if climbing a ladder).

After testing the system, cavers confirm an excellent performance and a 30%-efficiency's increase during the ascent.

High quality product, made in Italy!

Patented.

Usage activities

CLIMBING	MOUNTAINEERING	CAVING	ROPE ACCES	SS SAILBOA	TS
FIREBRIGAD	ES AND CIVIL PROTECTION	NOUN.	TAIN RESCUE	TACTICAL	

Item	C€ EN	Material	4å∖ (g)	Colour	Main dimension (mm)	Minimum rope diameter (mm)	Maximum rope diameter (mm)	Version
87609N04SKK	1	Alu alloy	130	Black	78	8	13	Left
87609O04DKK	1	Alu alloy	130	Orange	78	8	13	Right

CAM CLEAN TACTICAL





Chest rope clamp specifically conceived for climbing, caving, rescue, work at height, canyoning. All the components are part of the latest generation of Kong blockers. Excellent ability to block out particularly on muddy and icy ropes thanks to the holes on the cam. The new material and a special chemical and thermal process give to the cam, in addition to black color, a much higher surface hardness. The result is a great wear resistance and a reduction of the fragility that usually penalizes steels by quenching to low temperatures. New opening lever, ergonomic, easy to handle and protected from shocks and from the risk of accidental opening.

Fitted with anti-overturning system of the cam.

Quality product, made in Italy!

*The black color is particularly appreciated for all uses where the equipment must be not very visible (military use, theater and cinema, acrobatic shows, etc ...).

Usage activities

TACTICAL

Item	C€ EN	Material	4i) (g)	Colour	Main dimension (mm)	Minimum rope diameter (mm)	Maximum rope diameter (mm)	Version
82400N400KK	EN 567 EN 12841/B	Alu alloy	150	Black	115	8	13	Uni

DUCK TACTICAL





MULTIUSE COMPACT ROPE CLAMP

Innovative ultra-compact emergency rope clamp.

Designed for single ropes with a diameter between 8 and 13mm, Duck also works on slings màthaku Vario and Aro Sling Tubular.

Very small in size, it is easy to insert even with one hand.

In addition, the large attachment hole also allows the rotation of the locking carabiners.

Duck was born as an emergency ascender useful in recovery maneuvers, self-rescue, progression in preserves and as a regulator for lanyards or webbing.

Available set consisting of Duck + OVAL ALU screw connector (# 888SET001KK)

High quality product, completely made in Italy!

*The black color is particularly appreciated for all uses where the equipment must be not very visible (military use, theater and cinema, acrobatic shows, etc ...).

Usage activities

TACTICAL

Item	C€ EN	C € EN Material (g) Colour Main dimension (mm)		Main dimension (mm)	Minimum rope diameter (mm)	Maximum rope diameter (mm)	Version	
88800NN00KK	EN 567 UIAA	Alu alloy	70	Black	63	8	13	Uni

AID CLIMBING

SLING ASCENDER





PEDAL FOR ROPE ACCESS | ADJUSTABLE

Sling/pedal for aid climbing and rope access in mountaineering, free climbing, caving, work and rescue. Fitted with buckle for length regulation.

High quality product completely developed and produced in Italy.

Usage activities

MOUNTAINEERING	CAVING	RO	PE ACCESS	SAILBOATS	TREECLIMBING / ARBORICULTURE
FIREBRIGADES AND C	CIVIL PROTEC	TION	TACTICAL		

Item	Material	(g)	♦ (kN)	Color	A (mm)	B (mm)
834120300KK	Polyamide	90	1		900-1200	/

PULLEYS

EXTRA ROLL TACTICAL





Aluminum pulley with single wheel, mobile side plates and high efficiency (96%) ball bearing. Equipped with two attachment points for use in complex lifting systems.

For ropes up to 13 mm diameter.

High quality product, in Italy!

*The black color is particularly appreciated for all uses where the equipment must be not very visible (military use, theater and cinema, acrobatic shows, etc ...).

Usage activities

TACTICAL

Item	C€ EN	Body material	Wheel material	Efficiency (%)	4i\ (g)	Load (kN)	Ball Bearing	Bush	Color	Main dimension (mm)	Max rope diameter (mm)	Notes
82000NP00KK	EN 12278	Alu alloy	Alu alloy	96	245	30	Yes	No	Black	110.5	13	

PULLEYS

PAMIR FAST





Pulley with aluminum body and double stainless steel wheels. For use on ropes or steel cables of maximum diameter 13 mm.

Ideal for tiroline in adventure parks, it is also useful for creating double hoist rescue or work. High quality product completely made in Italy!

Conform to the requirements of the norm EN 17109, it is usable as a category A mobile connecting device.

It integrates perfectly into the Coudou Pro ZAZA series.

ZIP CAP #826060000KK Top protection that prevents the inadvertent introduction of fingers into the rotating elements of the pulleys (as required by the norm EN 17109), standard supplied!

Usage activities

ADVENTURE PARKS	ROPE ACCESS	FIREBRIGADES AND CIVIL PROTECTION	TACTICAL
-----------------	-------------	-----------------------------------	----------

Item	C€ EN	Body material	Wheel material	Efficiency (%)	4i) (g)	Load (kN)	Ball Bearing	Bush	Color	Main dimension (mm)	Max rope diameter (mm)	Notes
946004401KK	EN 12278 EN 17109 UIAA	Alu alloy	Stainless Steel	/	365	30	Yes	No	Blue	113	13	1
94600N401KK	EN 12278 EN 17109 UIAA	Alu alloy	Stainless Steel	1	365	30	Yes	No	Black	113	13	1

PULLEYS

SWING





Compact pulley with mobile side plates.

Available in 2 versions:

- Aluminum side plates, nylon wheel and ball bearing
- Stainless steel side plates, nylon wheel and bush For ropes up to 11 mm diameter.

High quality product, made in Italy!

Usage activities


SCAFFOLDING	S AND TRESTELS	ROOF AND INCLINE	ED PLANES	ROPE ACCESS	CONFINED SPACES
SAILBOATS	TREECLIMBING	ARBORICULTURE	TACTICAL		

Item	C€ EN	Body material	Wheel material	Efficiency (%)	4i) (g)	Load (kN)	Ball Bearing	Bush	Color	Main dimension (mm)	Max rope diameter (mm)	Notes
993P00100KK	EN 12278 UIAA	Alu alloy	Nylon	87	120	30	Yes	No	Polish	74	11	
993N00400KK	EN 12278 UIAA	Alu alloy	Nylon	87	120	30	Yes	No	Black	74	11	
994000000KK	UIAA	Stainless steel	Nylon	87	162	30	No	Yes	Polish	74	11	

PULLEYS

TWIN TACTICAL



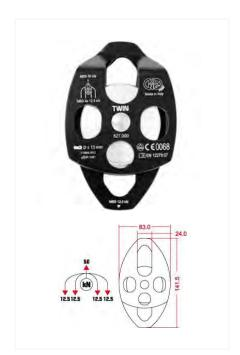

Aluminum pulley with double wheel, mobile side plates and high efficiency (96%) ball bearing.

Equipped with two attachment points for use in complex lifting systems.

For ropes up to 13 mm diameter.

High quality product, made in Italy!

*The black color is particularly appreciated for all uses where the equipment must be not very visible (military use, theater and cinema, acrobatic shows, etc ...).

Usage activities

TACTICAL

Item	C€ EN	Body material	Wheel material	Efficiency (%)	4i) (g)	Load (kN)	Ball Bearing	Bush	Color	Main dimension (mm)	Max rope diameter (mm)	Notes
82700NP00KK	EN 12278	Alu alloy	Alu alloy	96	490	50	Yes	No	Black	141.5	13	

LECCO 2.0 TACTICAL





BLACK VERSION

Evolution of a great classic, Lecco 2.0 is the new stretcher for mountain rescue that maintains the same versatility of the previous version with new features that make it even more versatile and efficient!

Product chosen by CNSAS - National Alpine and Speleological Rescue Corps

The main features are:

- new comfortable reinforced and hoistable carrying bag that allows ultra-fast stowage
- ready for use in less than a minute, assembled by a single operator
- pre-assembled frame and bag, with no components that can be lost
- new ergonomic handles with variable sections (oval-round) for better load distribution on the shoulders and more comfortable transport
- lateral zipper equipped with 4 sliders that allow partial opening for inspection and management of the injured person
- additional zipper at the foot
- immobilization straps made in different colors for fast operation
- transparent visor allows visual contact with the injured person to be maintained
- wide range of accessories that guarantee maximum reliability in the various conditions of use

Its length, shoulder supports included, is 3.1 meters. Without the supports it is 2 meters long. Refolded in its carrying ruck-sack, the stretcher measures 85x55x22 centimeters. The weight is 16 kg (without carriage bag).

The fabric cover has a range of webbing straps in different colors for seizing hold of the injured person at all key points. Four outer compression straps ensure the patient is safely secured. A double zipper allows the fabric cover to be completely opened for inspection, including of the lower limbs. Additional zipper at the foot. The generous cover size and compression strap lengths allow a vacuum mattress to be fitted (indispensable for immobilizing the injured person).

The front and rear shoulder supports are fitted with comfortable padding. The front shoulder supports can be inserted in a straight position for carriage on general terrain or reversed in position for extremely steep slopes or jutting drops, thus preventing the rescuer from slipping out of the shoulder supports. The length of the rear supports allow the rescuer to have good ground visibility.



Usage activities

TACTICAL

Item	Ref.	DM	UDI-DI	Standards	Material	Weight (kg)	Length (cm)	Width (cm)	Colour
87004NN00KK	870.04	Classe I	08023577058580	EU REGULATION 2017/745 EASA CM-CS005	Nylon Alu Alloy	16	198 (310)	46.5	Black

KIT EVEREST CARBON TACTICAL





BLACK VERSION

Helirescue kit composed of:

EVEREST BAG #855.00

Rescue helicopter bag designed to be used either with rescue board either with vacuum mattress.

Designed and tested with all type of lifting helicopter devices generally used.

Hanging attachment loops in different colours.

Provided with multipurpose pockets.

Manufactured with tear-proof nylon and Cordura®

Weight: kg 4

X-TRIM 2 # 855.11

Innovative foldable in two pieces spinal board made with carbon fiber, completely x-ray transparent, it can be inserted in T.A.C., Magnetic Resonance Imaging (M.R.I.) and other diagnosis apparatus, avoiding the moving of the injured.

Light weight and compact, only 4,9 kg with 5 mm thickness.

Designed and conceived for all kind of rescue intervention for operation in extreme conditions.

TAYLAN # 855.02

Webbing system for wounded fasting.

Easy to adjust and provided with a quick locking device using connectors.

Weight: kg1

PATTY # 855.03

Hanging kit made of two pieces of seven webbings, each one with different colours.

Light and compact, it supports loads till kN 4.

Weight: kg 0.5

HEAD IMMOBILIZER #855.06

Head immobilizer fitted with chin straps

for the correct immobilization of the injured.

Fast assembling with Velcro strips.

CARRIAGE RUCKSACK #855,28

Comfortable and compact rucksack with handles and resealable shoulder straps, easy to transport by one only rescuer or to lower with a winch.

Dimensions: height 95 cm - width 55 cm - depth 20 cm



Usage activities

TACTICAL

Item	Ref.	DM	UDI-DI	Standards	Material	Weight (kg)	Length (cm)	Width (cm)	Colour
855SETN12KK	1	/	/	EU REGULATION 2017/745 EASA CM-CS005	Carbon Cordura Nylon	14.5	183	42	Black

911 HIVE





BASKET STRETCHER WITH LIGHTENED SHELL

Basket stretcher fitted with a shell that has hexagonal holes that allow water and sand to drain out. Extremely lightweight, it can be disassembled into two parts for easy transport. Equipped with internal padding and fastening straps.

Optional removable shoulder straps #880060KITKK

Lightweight aluminum alloy frame, thermoformed HDPE (High-Density Polyethylene) protective shell, offering excellent patient protection.

Easy to clean and disinfect thanks to the removable inner padding.

Easily transportable by hand thanks to the tubular structure that runs around the perimeter, offering easy handling by multiple operators.

Suitable for helicopter transport (length just under 2m is compatible with most helicopter cabins). Fitted with hanging kit ARIES #880070100KK

Can be divided into 2 pieces and easily loaded on the shoulders with the straps provided.

Optimized connection system between the two halves, central hinge for quick and easy connection, self-centering side pins and quick-locking screw sleeve.

Compatible with all Kong immobilization devices (X-TRIM spinal boards and Vacuum mattress). Compatible with Flok-IT flotation system #880020300KK

The perfectly symmetrical shape allows the patient to be positioned in either orientation.

The straps are equipped with automatic buckles made of high-strength polymer material.

Rapid product identification via unique serial code and NFC chip.

Length: 1980 mmWidth: 600 mmHeight: 170 mm

Weight: 9.00 kg (excluding shoulder straps and hanging kit)

High quality product, designed and manufactured in Italy!



Usage activities

FIREBRIGADES AND CIVIL PROTECTION	HELIRESCUE	MOUNTAIN RESCUE	TACTICAL
-----------------------------------	------------	-----------------	----------

Item	Ref.	DM	UDI-DI	Standards	Material	Weight (kg)	Length (cm)	Width (cm)	Colour
880060000KK	880.06	Classe I	08023577071220	EU REGULATION 2017/745 EASA CM-CS005	Alu Alloy HDPE	9	198	60	Black Grev

911 ARMOR





BASKET STRETCHER FOR TERRESTRIAL SCENARIOS

Extremely lightweight shell stretcher that can be disassembled into two parts for easy transport, equipped with internal padding and fastening straps.

Optional removable shoulder straps #880060KITKK

Lightweight aluminum alloy frame, thermoformed HDPE (High-Density Polyethylene) protective shell, offering excellent patient protection.

Easy to clean and disinfect thanks to removable inner padding.

Easily transportable by hand thanks to the tubular structure that runs around the perimeter, offering easy handling by multiple operators.

Suitable for helicopter transport (length just under 2m is compatible with most helicopter cabins). Fitted with hanging kit ARIES #880070100KK

Can be divided into 2 pieces and easily loaded on the shoulders with the straps provided.

Optimized connection system between the two halves, central hinge for quick and easy connection, self-centering side pins and quick-locking screw sleeve.

Compatible with all Kong immobilization devices (X-TRIM spinal boards and Vacuum mattress). Compatible with Flok-IT flotation system #880020300KK

The perfectly symmetrical shape allows the patient to be positioned in either orientation.

The straps are equipped with automatic buckles made of high-strength polymer material.

Rapid product identification via unique serial code and NFC chip.

Length: 1980 mmWidth: 600 mmHeight: 170 mm

Weight: 9.50 kg (excluding shoulder straps and hanging kit)

High quality product, designed and manufactured in Italy!




Usage activities

FIREBRIGADES AND CIVIL PROTECTION HELIRESCUE MOUNTAIN RESCUE TACTICAL

	Item	Ref.	DM	UDI-DI	Standards	Material	Weight (kg)	Length (cm)	Width (cm)	Colour
88	0070000KK	880.07	Classe I	08023577071237	EU REGULATION 2017/745 EASA CM-CS005	Alu Alloy HDPE	9,5	198	60	Black Grey

ROLLY



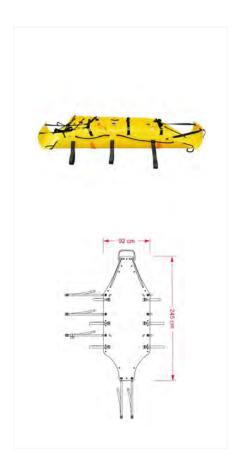

ROLLABLE STRETCHER | CONFINED SPACES

Rollable medical device designed for confined space rescue; particularly suitable for the evacuation of injured persons from places with tight or complicated passages.

An extremely flexible device, very useful in evacuating injured persons under complex environmental conditions

Without rigid frames, it is easily stowed and transportable in its bag fitted with shoulder straps and side zip.

Main features:

- Increased thickness giving greater resistance to rubbing, increased patient protection and greater stability during handling.
- Easy to clean and disinfect.
- Hanging kits for vertical transportation in wells or tunnels.
- Hanging kit for horizontal winching, even by helicopter (mod. Serpens #890010100KK).
- Side handles for multi-operator transportation, with high visibility reflective indicators for quick recognition in dark areas.
- Easy maintenance with separately replaceable components.
- Quick product identification via unique serial number and NFC chip.
- Available in two colors, yellow or black.
- Head/foot orientation stickers that facilitate correct patient positioning.
- Can be used alone or in combination with a spinal board, vacuum mattress or positive pressure mattress.
- Compatible with Flok-IT flotation system #880020300KK

Available in shortened version, HALF ROLLY, which can be used alone or in combination with the ROLLY as an immobilizer for vertical transport.

High quality, made in Italy!



NFC READY

Usage activities

CONFINED SPACES

FIREBRIGADES AND CIVIL PROTECTION


MOUNTAIN RESCUE

TACTICAL

Item	Ref.	DM	UDI-DI	Standards	Material	Weight (kg)	Length (cm)	Width (cm)	Colour
89001N000KK	890.01	Classe I	08023577051727	EU REGULATION 2017/745	Nylon	7,3	245	92	Black
890010000KK	890.01	Classe I	08023577051727	EU REGULATION 2017/745	Nylon	7,3	245	92	Yellow

HALF ROLLY



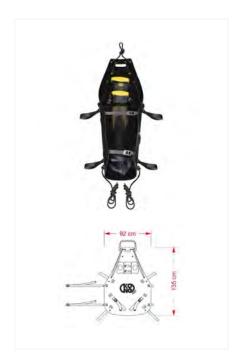

Rollable medical device designed for rescue in confined spaces; it is particularly suitable for the evacuation of the injured from narrow places and with narrow or complicated steps. It can be used alone or in combination with ROLLY as immobilizer during vertical transport. It is a highly flexible device, very useful in the evacuation of the injured in complex environmental conditions.

Main features:

- Free of rigid frames and easily storable and transportable in its bag with shoulder straps.
- Easy to clean and disinfect.
- Hanging kit for vertical transportation in pits or tunnels.
- Side handles for transportation by several operators.
- Easy maintenance due to replaceable components.
- High quality, produced in Italy



NFC READY

Usage activities

CONFINED SPACES TACTICAL

Item	Ref.	DM	UDI-DI	Standards	Material	Weight (kg)	Length (cm)	Width (cm)	Colour
89002N000KK	/	/	080/23577055909	EU REGULATION 2017/745	Nylon	5	135	92	Black

DISPO-BAG





Disposable bag made of completely waterproof plastic laminate for the recovery of bodies.

The bag measures 205 cm in length by 90 cm in width and has 6 handles for carrying by hand.

Zipper with double slider to facilitate opening and closing.

Equipped with a transparent pocket to insert any annotations.

Usage activities

FIREBRIGADES AND CIVIL PROTECTION	HELIRESCUE	MOUNTAIN RESCUE	TACTICAL
-----------------------------------	------------	-----------------	----------

Item	Ref.	DM	UDI-DI	C€ EN	Material	(g)	Colour	Notes
871910000KK	/	/	1	/	PVC	1210	Black	1

QUICK RELEASE QRK





QUICK RELEASE FOR HELICOPTERS EVACUATION | ALU ALLOY | 3 VERSIONS

Brand new device designed for the release of fast ropes used during fast evacuation from helicopter. Available in three versions, with two sizes of slots for helicopter winch, fixed or openable, to suit all kind of hooks.

Wide passage to use all types of fast ropes.

Push-button release system fitted with safety pin.

It can also be used with metal terminations.

Made of light aluminum alloy.

Tested for maximum 12 people.

Revolutionary high quality product, fully developed and made in Italy!

Usage activities

TACTICAL

Item	C€ EN	Material	4 i (g)	♦ (kN)	Size	Colour	A (mm)	Hole diameter (mm)	Notes
88101N004KK	1	Alu alloy	1700	/	01	Black	186	19	Small Slot
88102N004KK	1	Alu alloy	1720	/	03	Black	186	50	Openable big slot
88103N004KK	1	Alu alloy	1715	1	02	Black	186	50	Fixed big slot

FAST ROPE



Marlow°



Fast Rope for rapid evacuation from helicopters.

Available with 3 types of termination: dynalite (DLT), multifit (MFT) and spliced eye (SE).

The Fast Rope diameter is 40 mm and the length can be selected from a wide range of possibilities.

Marlow is a world leader in fast rope and F.R.I.E.S. production. Their products are used by hundreds of operators, armed forces and special teams around the world. Kong is the exclusive importer and distributor of Marlow products in Italy and the only company authorized to provide warranty and inspection on these products.

Usage activities

TACTICAL

Item	NSN Code	Length (m)	Diameter (mm)	Size	Notes
9R040D1S122	4020-99-895-4343	12,2	40	1	Dynalite Termination (DLT)
9R040D1S152	4020-99-242-9307	15,2	40	1	Dynalite Termination (DLT)
9R040D1S183	4020-99-743-0451	18,3	40	1	Dynalite Termination (DLT)
9R040D1S274	4020-99-896-0900	27,4	40	1	Dynalite Termination (DLT)
9R040S1S122	1	12,2	40	1	Spliced Eye (SE)
9R040S1S152	1	15,2	40	1	Spliced Eye (SE)
9R040S1S274	1	27,4	40	/	Spliced Eye (SE)

S.P.I.E.



Marlow[®]



S.P.I.E. (SPECIAL PATROL INSERTION & EXTRACTION)

Marlow's extraction system has been designed for the transportation of a larger number of personnel with increased safety.

Higher strength to accommodate greater number of personnel (10 to 12 as standard).

Two loop integrated colour coded safety system for all personnel: personal loop (green) and back-up loop (red).

One yellow loop for easy retrieval of the rope itself at the end of the helicopter operation.

Main rope material: Polyester.

Personnel loops material: UHMPE (Ultra High Modulus Polyethylene).

Spliced eye (SE) termination.

Available lengths: 27,4m and 40m.

Marlow is a world leader in fast rope and F.R.I.E.S. production. Their products are used by hundreds of operators, armed forces and special teams around the world. Kong is the exclusive importer and distributor of Marlow products in Italy and the only company authorized to provide warranty and inspection on these products.

Usage activities

TACTICAL

Item	NSN Code	Length (m)	Diameter (mm)	Size	Notes
9R028S1E274	I	27,4	28	1	Spliced Eye (SE)
9R028S1E400	1	40	28	/	Spliced Eye (SE)

F.R.I.E.S.



Marlow[®]



Marlow F.R.I.E.S. (Fast Rope Insertion & Extraction Systems) are designed and developed to deploy and evacuate rapidly, reducing the risk for operators and helicopters.

Each F.R.I.E.S. can carry up to 6 fully equipped persons through its loops, and it can also be used as a standard fast rope.

Available with 3 types of terminals: dynalite (DLT), multifit (MFT) and spliced eye (SE). The diameter of the F.R.I.E.S. is 40 mm and the length can be selected from a wide range of possibilities.

Marlow is a world leader in fast rope and F.R.I.E.S. production. Their products are used by hundreds of operators, armed forces and special teams around the world. Kong is the exclusive importer and distributor of Marlow products in Italy and the only company authorized to provide warranty and inspection on these products.

Usage activities

TACTICAL

Item	NSN Code	Length (m)	Diameter (mm)	Size	Notes
9R040D1F183	1	18,3	40	1	Dynalite Termination (DLT)
9R040D1F274	/	27,4	40	/	Dynalite Termination (DLT)

S.P.I.E. WPX



Marlow®



S.P.I.E. (SPECIAL PATROL INSERTION & EXTRACTION) WPX

Marlow's floating extraction system allows easier retrieval from waterborne operations. Designed to carry 10 to 12 personnel.

Two loop integrated colour coded safety system for all personnel: personal loop (green) and back-up loop (red).

One yellow loop for easy retrieval of the rope itself at the end of the helicopter operation.

Super strong and light-weight.

The main rope has been designed for low shock loads.

Main rope material: Polyolefin

Personnel loops material: UHMPE (Ultra High Modulus Polythylene)

Spliced eye (SE) termination.

Available lengths: 27,4m and 40m.

Marlow is a world leader in fast rope and F.R.I.E.S. production. Their products are used by hundreds of operators, armed forces and special teams around the world. Kong is the exclusive importer and distributor of Marlow products in Italy and the only company authorized to provide warranty and inspection on these products.

Usage activities

TACTICAL

Item	NSN Code	Length (m)	Diameter (mm)	Size	Notes
9R030S1E274	1	27,4	30	1	Spliced Eye (SE)
9R030S1E400	/	40	30	/	Spliced Eye (SE)

MARLOW FAST ROPE RACK







FAST ROPE DESCENDER

Innovators in the field of rope technology, Marlow Ropes Ltd designed and developed the original Fast Rope in conjunction with the British Special Forces. These ropes are now in use by traditional Special Forces and SWAT teams across the globe.

Marlow have now launched the Fast Rope Rack (FRR) to be used in conjunction with 40mm fast rope and to aid the rapid insertion of units. This innovative British-made device (European Union registered design no. 004389369-0001) is:

- Quick and easy to install
- Ideal for descending with multiple loads and the insertion of non-Fast Rope qualified personnel such as Medics, Interpreters, locals, Bomb Disposal specialists in addition to descending with dogs.

This set consists of: FAST ROPE RACK + LANYARD + QUICK OUT LINK ATTACHMENT



This product is available only in the following countries: Italia

Usage activities

TACTICAL

Item	NSN Code	Length (m)	Diameter (mm)	Size	Notes
9RFAA1250KK		1	/	UNI	/

FAST ROPE AND F.R.I.E.S. BAG







Marlow's Fast Rope Transportation and Deployment Bag is designed with backpack straps and a padded back section for easy one person carrying.

It comes with compression straps to secure the internal load and strong handles for manoeuvring and storage.

The bag is finished off with an external pocket for use log and an Internal clip for attachment to Marlow Fast Ropes for deployment.

Marlow is a world leader in fast rope and F.R.I.E.S. production. Their products are used by hundreds of operators, armed forces and special teams around the world. Kong is the exclusive importer and distributor of Marlow products in Italy and the only company authorized to provide warranty and inspection on these products.

Usage activities

TACTICAL

Item	NSN Code	Length (m)	Diameter (mm)	Size	Notes
9RFAA1140KK	1	/	1	Small - Compatible with 12.2 & 18.3 meters	Premium 1000 Denier Black
9RFAA1150KK	/	/	1	Large - Compatible with 27.4 & 36.6 meters	Premium 1000 Denier Black

FAST ROPE BAG



Marlow®



A practical bag specifically designed to store Fast Ropes which ensures improved storage and transport for your fast ropes.

It allows to keep Fast Ropes clean, dry and protected from UV rays.

This Fast Rope Bag will be provided with all orders of fast rope up to the measurements stated below.

Features:

- Dimensions: 112 x 40 x 30cms.
- Made from 1000 Denier PVC material, nylon webbing
- Colour: Black
- Twin zipper for easy access to the contents of the bag
- Suitable for Fast Ropes from 12.2 metres (40 Feet) to 36.6 metres (120 Feet)

Marlow is a world leader in fast rope and F.R.I.E.S. production. Their products are used by hundreds of operators, armed forces and special teams around the world. Kong is the exclusive importer and distributor of Marlow products in Italy and the only company authorized to provide warranty and inspection on these products.

Usage activities

TACTICAL

Item	NSN Code	Length (m)	Diameter (mm)	Size	Notes
9RFAA1350KK	/	/	/	/	Dimensions: 112x40x30 cm

FAST ROPE GLOVES



Marlow[®]



Kevlar® lined cowhide leather glove with a split leather palm for improved grip, durability, insulation and heat resistance when fast roping. The Neoprene and leather cuff provides a secure fit with a spandex/elastane stretch back adding comfort and flexibility.

The unique flexibility and grip characteristics allows the user greater versatility as the gloves can both be worn during Fast Roping descents and when using equipment and weapons.

Glove properties:

- Cowhide leather glove
- Split leather palm
- 4 way stretch spandex back
- Neoprene and leather cuff
- Kevlar® lined palm
- Adjustable velcro wrist

Marlow is a world leader in fast rope and F.R.I.E.S. production. Their products are used by hundreds of operators, armed forces and special teams around the world. Kong is the exclusive importer and distributor of Marlow products in Italy and the only company authorized to provide warranty and inspection on these products.

Usage activities

TACTICAL

Item	NSN Code	Length (m)	Diameter (mm)	Size	Notes
9RFAA1293KK	1	1	1	M	/
9RFAA1294KK	1	1	1	L	1
9RFAA1295KK	1	1	/	XL	/

FAST ROPE GLOVES ARAMID







Gloves manufactured from reinforced leather with wool lining and Velcro wrist adjustment.

Kevlar lined palms provide further wear and heat resistance when Fast Roping.

Black suede leather palm reinforcements for additional grip, non-padded trigger finger for optimum weapon control, Kevlar lining for additional heat and cut resistance.

Marlow is a world leader in fast rope and F.R.I.E.S. production. Their products are used by hundreds of operators, armed forces and special teams around the world. Kong is the exclusive importer and distributor of Marlow products in Italy and the only company authorized to provide warranty and inspection on these products.

Usage activities

TACTICAL

Item	NSN Code	Length (m)	Diameter (mm)	Size	Notes
9RFAA0390KK	8415-99-833-0146	1	1	S	1
9RFAA0350KK	8415-99-833-0147	1	1	M	1
9RFAA0360KK	8415-99-833-0148	/	/	L	1
9RFAA0700KK	1	1	1	XL	/

TACTICAL RAPPEL/FAST ROPE GLOVES







Yates Tactical rappel/Fast Rope Gloves.

Thick full-grain leather second palm extends over the palm and to the second joint of your fingers to provide added protection from the heat and friction generated when fast roping. The index finger is separated for trigger finger dexterity. Carabiner hole in the wrist for attaching to harness. The entire glove is sewn with heat resistant KEVLAR thread.

Available in Black and Coyote Tan.

5 sizes available: (S, M, L, XL, 2XL).

This device is not suitable for private use, and it is specifically designed for use by the armed forces or in the maintenance of law and order.

Usage activities

TACTICAL

Item	NSN Code	Standards	4 is (g)	Size	Colour	Length (cm)	Notes
9Y9250002YY	8415016299029	1	1	S	Black	1	1
9Y9250003YY	8415016299010	1	1	М	Black	1	1
9Y9250004YY	8415016299028	1	1	L	Black	1	1
9Y9250005YY	8415016299014	1	1	XL	Black	1	1
9Y9250006YY	8415016299017	1	1	XXL	Black	1	1
9Y925T002YY	1	1	1	S	Coyote	1	1
9Y925T003YY	1	1	1	М	Coyote	1	1
9Y925T004YY	1	1	1	L	Coyote	1	1
9Y925T005YY	1	1	1	XL	Coyote	1	1
9Y925T006YY	1	1	1	XXL	Coyote	1	1

LOTOR





MULTI-DIRECTIONAL OPENABLE RING

Multi-directional openable ring, suitable for semi-permanent equipment connection.

Ensures optimal load distribution in any position.

Uniform load of 22 kN in all directions, it is tested according to the recent UIAA 130 (Load Sharing Device).

It allows more than two devices to be connected, distributing the load evenly.

Read the standard, click here.

Conforms to EN 362/M standard with a 24 kN load.

Wide 15 mm opening that allows ropes with sewn terminations to be inserted.

Removable gate by slotted screw that does not require the use of special tools, just a simple flat screwdriver.

Asymmetric shape that eliminates the chance of assembly error.

Screw equipped with a rubber seal that ensures optimal tightening without annoying vibrations.

The body has a central flattening construction with raised edges that both increases the load capacity and protects the markings.

Available in 2 sizes, with internal diameter of 42 and 48 mm.

Designed and manufactured completely in Italy!

Usage activities

METAL STRUCTURES	ROPE ACCESS	CABLEWAY EVACUATION		TREECLIMBING / ARBORICULTURE			
FIREBRIGADES AND CI	VIL PROTECTION	HELIRESCUE	MOUNTAIN	N RESCUE	TACTICAL	K9	

Item	C€ EN	Material	(g)	♦ (kN)	Size	Colour	A (mm)	Hole diameter (mm)	Notes
96042NN00KK	UIAA 130 EN 362/M	Alu alloy	65	24	42	Black	1	42	1
96048NO00KK	UIAA 130 EN 362/M	Alu alloy	75	24	48	Black Orange	1	48	1

ANA





ALUMINUM RING

Connection aluminium ring, available in two sizes (28 and 46 mm), tensile strength 25 kN Marked with a serial number for perfect tracking of the life of the product.

Usage activities

TREECLIMBING / ARBORICULTURE IRC	NWARE TACTICAL	K9
----------------------------------	----------------	----

Item	C€ EN	Material	/i/ (g)	♦ (kN)	Size	Colour	A (mm)	Hole diameter (mm)	Notes
930028O00KK	RfU CNB/P/11.114	Alu alloy	40	25	/	Orange	1	28	1
930046O00KK	RfU CNB/P/11.114	Alu alloy	60	25	1	Orange	1	46	1
930046N00KK	RfU CNB/P/11.114	Alu allov	60	25	/	Black	1	46	/

ARGON 5





ALU ALLOY | SCREW SLEEVE | ASYMMETRIC

Argon is a carabiner dedicated to people who seek extreme lightness and the slightest dimensions. Designed for better rope glide, to ensure good positioning of belay devices and shape adapted for easy tying and untying of a clove hitch. Wider rope contact surfaces for reduced wear on the carabiner. The D shape transfers the majority of the load onto the spine, the carabiner strongest axisThe asymmetric shape, furthermore, is ideal for connecting belay or rappel devices or for use at the end of a lanyard. The screw sleeve is recommended for dirty environments, where other spring-loaded sleeve may jam due to dirt.

Key features:

- Very compact shape ideal for belay station
- Low-profile for reduced bulk
- Keylock system
- Screw sleeve easy to employ one-handed
- HIGH QUALITY PRODUCT, COMPLETELY MADE IN ITALY

Usage activities

С	LIMBING	NOUN	NTAINEERING	CAVING	ROOF AND INCLINED PLANES	ROPE ACCESS
С	ONFINED S	PACES	TACTICAL			

Item	Standards	Material	1	Colour	∢► (kN)	♦ (kN)	\mathbf{O} (kN)	(g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve
719HA0NNNKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Black/Black/Black	22	9	7	43	Asymmetric	93	52	1	1	15	Screw
719HA0BDBKK	EN 12275 EN 362/B UJAA	Alu alloy	Keylock	Cyan/Grey/Cyan	22	9	7	43	Asymmetric	93	52	/	/	15	Screw

ERGO AUTO BLOCK





ALUMINUM CARABINER | AUTO BLOCK SYSTEM

Compact and lightweight carabiner, with a high tensile strength.

The particular shape makes it suitable to be handled more easily by people with small hands, like women or children.

3 movements Auto Block sleeve: to open the carabiner, lift the sleeve, rotate it, and then pull the gate.

Key Features:

- Improved opening and capabilities thanks to the bent D-shaped
- Slim profile for a small footprint
- Keylock system
- High quality product completely developed and manufactured in Italy
- Tested piece by piece

Usage activities

CLIMBING	MOUI	NTAINEERING	SCAFFOLDING AND TRES	STELS	ROOF AND INCLINED PLANES
CONFINED S	PACES	LADDERS AND	D ELEVATING PLATFORMS	TRE	ECLIMBING / ARBORICULTURE
TACTICAL					

Item	Standards	Material	1	Colour	∢► (kN)	♦ (kN)	O (kN)	4i) (g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve	
783IM0PPPKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Polished	27	7	/	65	Asymmetric	99	64	11,5	1	16	Auto block	
783IM0NNNKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Black	27	7	/	65	Asymmetric	99	64	11.5	/	16	Auto block	

ERGO TWIST LOCK





ALU ALLOY | TWIST LOCK SLEEVE | ASYMMETRIC

Compact and lightweight carabiner, with a high tensile strength.

The particular shape makes it suitable to be handled more easily by people with small hands, like women or children.

2 movements Twist Lock sleeve: to open the carabiner, rotate the sleeve and then pull the gate.

Key Features:

- Improved opening and capabilities thanks to the bent D-shaped
- Slim profile for a small footprint
- Keylock system
- High quality product completely developed and manufactured in Italy
- Tested piece by piece

Usage activities

CLIMBING	ı	MOUNTAINEERING		SCAFFOLD	ING AND TRESTELS	ROOF AN	ID INCLINED PLA	ANES
ROPE ACCES	SS	CONFINED SPACE	S	LADDER	S AND ELEVATING PL	ATFORMS	SAILBOATS	
TREECLIMBIN	NG	/ ARBORICULTURE	1	TACTICAL				

Item	Standards	Material	1	Colour	∢► (kN)	♦ (kN)	O (kN)	4▲ (g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve
783IG0PPPKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Polished	27	7	/	65	Asymmetric	99	64	11,5	1	17	Twist lock
783IG0NNNKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Black	27	7	/	65	Asymmetric	99	64	11.5	/	17	Twist lock

ERGO SCREW SLEEVE





ALU ALLOY | SCREW SLEEVE | ASYMMETRIC

Compact and lightweight carabiner, with a high tensile strength.

The particular shape makes it suitable to be handled more easily by people with small hands, like women or children.

Main Features:

- Improved opening and capabilities thanks to the bent D-shaped
- Slim profile for a small footprint
- Keylock system
- High quality product completely developed and manufactured in Italy
- Tested piece by piece

Usage activities

CLIMBING	MOUNTAINEERIN	NG	CANYONING	CAVING	i	SNOW & ICE	
SCAFFOLDING	AND TRESTELS	ROOF	AND INCLINED	PLANES	F	IREBRIGADES AN	ND CIVIL PROTECTION
HELIRESCUE	MOUNTAIN RE	SCUE	TACTICAL				

Item	Standards	Material	2	Colour	∢► (kN)	♦ (kN)	(kN)	(g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve
783IA0NNNKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Black/Black/Black	27	10	9	58	Asymmetric	99	64	11,5	1	19	Screw
783IA0PPPKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Polished	27	10	9	58	Asymmetric	99	64	11,5	1	19	Screw
783IA0NCPKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Black/Yellow/Polished	27	10	9	58	Asymmetric	99	64	11,5	1	19	Screw

FERRATA AUTO BLOCK





ALUMINUM ALLOY | AUTO BLOCK SLEEVE | WIDE OPENING

Aluminum carabiner with 3 movements Auto Block sleeve and Keylock system. Its special shape allows a large aperture (less than 26 mm!) and excellent grip. The Auto Block sleeve makes it suitable for professional use.

Normally used on lanyards for progression and positioning.

Key Features:

- Improved opening and capabilities thanks to the D-shaped bent
- Keylock system
- High quality product completely developed and manufactured in Italy
- Tested piece by piece

Usage activities

N	MOUNTAINEERING	SCAFFOLDI	NG AI	ND TREST	ELS	ROOF	AND INCLINED PLANES	
N	METAL STRUCTURES	ROPE ACC	ESS	CONFI	NED S	SPACES	LADDERS AND ELEVA	TING PLATFORMS
1	TREECLIMBING / ARBO	DRICULTURE	TA	CTICAL				

Item	Standards	Material	1	Colour	∢► (kN)	♦ (kN)	O (kN)	(g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve	Features
778MM0RPPKK	EN 362/B EN 12275/K UIAA	Alu alloy	Keylock	Red/Polished/Polished	30	8	12	95	Asymmetric	117.5	80	14	1	26	Auto block	/
778MM0PPPKK	EN 362/B EN 12275/K UIAA	Alu alloy	Keylock	Polished	30	8	12	95	Asymmetric	117.5	80	14	1	26	Auto block	/
778MM0NNNKK	EN 362/B EN 12275/K UIAA	Alu alloy	Keylock	Black	30	8	12	95	Asymmetric	117.5	80	14	1	26	Auto block	/

FERRATA EXPRESS SLEEVE





ALUMINUM CARABINER | EXPRESS SLEEVE

Aluminum carabiner with Express sleeve and Keylock system. The most classic carabiner for via ferrata. Its special shape allows a large opening and a good grip. Express sleeve: to open the carabiner must lower the sleeve and then pull the gate.

It is normally used mounted on a lanyard or via ferrata set.

Key Features:

- Improved opening and capabilities thanks to the D-shaped bent
- Keylock system
- High quality product completely developed and manufactured in Italy
- Tested piece by piece

Usage activities

FERRATA

TACTICAL

Item	Standards	Material	1	Colour	∢► (kN)	♦ (kN)	O (kN)	4 is (g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve	Features	
778MU0NNNKK	EN 362/B EN 12275/K UIAA	Alu alloy	Keylock	Black	30	10	12	90	Asymmetric	117.5	80	14	1	27	Express	/	
778MU0PPPKK	EN 362/B EN 12275/K UIAA	Alu alloy	Keylock	Polished	30	10	12	90	Asymmetric	117.5	80	14	/	27	Express	1	

FERRATA TWIST LOCK





ALUMINUM CARABINER | TWIST LOCK SYSTEM

Aluminum carabiner with 2 movements Twist Lock sleeve and Keylock system. Its special shape allows a large aperture (less than 26 mm!) and excellent grip. The Twist Lock sleeve makes it suitable for professional use.

Normally used on lanyards for progression and positioning.

Key Features:

- Improved opening and capabilities thanks to the D-shaped bent
- Keylock system
- High quality product completely developed and manufactured in Italy
- Tested piece by piece

Usage activities

CANYONING	CAV	ING	SCA	FFOLI	DING AND	TRESTELS	ROOF	AND INCLINED PLANES
METAL STRUCT	URES	ROI	PE ACCI	ESS	CABLE	WAY EVACU	ATION	CONFINED SPACES
TREECLIMBING	/ ARBC	RICUL	TURE	TA	CTICAL			

Item	Standards	Material	1	Colour	∢⊳ (kN)	♦ (kN)	(kN)	(g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve	Features
778MG0NNNKK	EN 362/B EN 12275/K UIAA	Alu alloy	Keylock	Black/Black/Black	30	8	12	95	Asymmetric	117,5	80	14	1	26	Twist lock	/
778MG0PPPKK	EN 362/B EN 12275/K UIAA	Alu alloy	Keylock	Polish	30	8	12	95	Asymmetric	117,5	80	14	/	26	Twist lock	/
778MG0RPPKK	EN 362/B EN 12275/K UIAA	Alu alloy	Keylock	Red/Polished/Polished	30	8	12	95	Asymmetric	117,5	80	14	/	26	Twist lock	/

FERRATA SCREW SLEEVE





ALUMINUM CARABINER | SCREW SLEEVE

Aluminum carabiner with screw sleeve and Keylock system. Its special shape allows a large aperture (less than 27 mm!) and excellent grip. The screw sleeve makes it suitable for professional use.

Normally used on lanyards for progression and positioning.

Key Features:

- Improved opening and capabilities thanks to the D-shaped bent
- Keylock system
- High quality product completely developed and manufactured in Italy
- Tested piece by piece

Usage activities

CANYONING	CAVING	SNO	W & ICE	S	CAFFOLDING AND TRESTELS
ROOF AND INCL	INED PLANES	RO	PE ACCE	SS	CABLEWAY EVACUATION
TREECLIMBING	/ ARBORICUL	TURE	TACTIC	AL	

Item	Standards	Material	1	Colour	∢► (kN)	♦ (kN)	O (kN)	4 is (g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve	Features	
778MA0NNNKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Black	30	10	12	90	Asymmetric	117.5	80	14	/	27	Screw	1	
778MA0PPPKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Polished	30	10	12	90	Asymmetric	117.5	80	14	/	27	Screw	/	

FROG





ALUMINUM ALLOY | AUTOMATIC CLOSURE

With an innovative approach that characterizes KONG comes the Frog, a revolutionary directional connector with an automatic clamping action that engages when it touches the anchor point.

Produced after an intensive design phase in collaboration with Politecnico of Milan, the Frog is a totally new connector, both in its appearance and mechanism.

Frog makes the concept of a carabiner thought of as a "hook" obsolete.

The insertion is extraordinarily quick and safe, even in "distant" anchor points, not easily reached with standard connectors.

It automatically clamps when coming into contact with the anchor point.

Sling length of 120mm.

High quality, completely developed and produced in Italy.

Tested piece by piece.

Patented.

New version with a fixed pin that prevents any possibility of disassembly.

Usage activities

CLIMBING	MOUNTAINEERING	ROOF AND INCLINED PLANES	ROPE ACCESS	TACTICAL
K9				

Item	Standards	Material	Colour	∢► (kN)	▲ (kN)	\mathbf{O} (kN)	(g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve	Features
24016NOO0KK	EN 12275 EN 362/A/T	Alu alloy	Black/Orange	23	/	/	75	Special	180	51	/	/	12.7	Without sleeve	1

FROG 360





"TEXTILE FRIENDLY" SWIVEL

FROG 360 is the integration of our famous FROG connector with a "textile friendly" swivel. It allows direct connection with textile elements and the creation of no-twisting lanyards.

Thanks to the innovative automatic closing system of the gates, it allows a quick and safe directional connection.

High quality product made in Italy!


Usage activities

SCAFFOLDING AND T	RESTELS	ROOF AND INCLINED PLANES	METAL STRU	CTURES	RO	OPE ACC	ESS
CONFINED SPACES	LADDEF	RS AND ELEVATING PLATFORMS	SAILBOATS	TACTIC	AL	K9	

Item	Standards	Material	Colour	∢► (kN)	♦ (kN)	O (kN)	(g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve	Features
7040XNNNNKK	EN 362/A/T EN 12275/A	Alu alloy	Black	23	/	1	135	Special	130	51	/	1	12.7	Without sleeve	Eye
7040XNNONKK	EN 362/A/T EN 12275/A	Alu alloy	Black/Orange	23	1	/	135	Special	130	51	/	1	12.7	Without sleeve	Eye

FROG CABLE



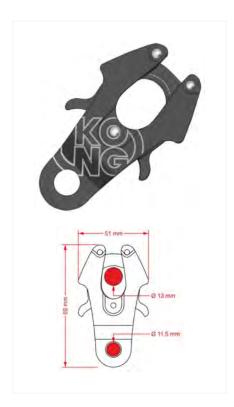

ALUMINUM ALLOY | FOR METAL CABLES | AUTOMATIC CLOSURE

With an innovating approach, that characterizes KONG, comes out Frog, a revolutionary directional connector, provided with an automatic clamping that takes place touching the anchor point.

Produced after a hard design in collaboration with Politecnico of Milan, Frog is a totally new connector, both in the appearance and in the mechanism.

Frog makes obsolete the concept of a carabiner thought as a "hook".

The insertion is extraordinary quick and safe, even in "far" anchor points, not easy to be reached with standard connectors.

It automatically clamps coming into contact with anchor point.

Special for anchoring on metal cables.

High quality product completely developed and produced in Italy.

Tested piece by piece.

Patented.

Usage activities

ROOF AND INCLINED PLANES	METAL STRUCTURES	ROPE ACCESS	SAILBOATS	TACTICAL
К9				

Item	Standards	Material	1	Colour	∢► (kN)	♦ (kN)	(kN)	(g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve	Features
7000XGNN0KK	EN 362/A/T EN 12275/A UIAA EAC	Alu alloy		Black	25	/	1	50	Special	89	51	/	11.5	13	Without sleeve	Eye

GUIDE SCREW SLEEVE





ALUMINUM ALLOY | SCREW SLEEVE

Aluminum carabiner light and high load, with screw sleeve and Keylock system. The D shape transfers the majority of the load on the main axis of the carabiner, which is the most resistant. The asymmetric shape is also ideal for belay systems. The screw sleeve allows to have a safer closing of the gate, and also makes it suitable for professional use. Usefull for use during bolt belay.

Key Features:

- Heavy load
- Keylock System
- High quality product completely developed and manufactured in Italy
- Tested piece by piece

Usage activities

CLIMBING	MOUNTAINEER	CAVING SNOW & ICE			SCAFFOLDING AND TRESTELS						
ROOF AND IN	NCLINED PLANES	COI	NFINED SPACES LADD			DDERS AND ELEVATING PLATFORMS					
TREECLIMBI	NG / ARBORICULTU	JRE	FIREBRIGAD	DES.	AND CIVIL PR	OTECTION	TACTICAL				

Item	Standards	Material	1	Colour	∢► (kN)	♦ (kN)	(kN)	4▲ (g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve	Features
733LA0RNPKK	EN 362/B EN 12275/B UIAA	Alu alloy	Keylock	Red/Black/Polished	30	10	10	70	Asymmetric	110	62.5	11	/	19	Screw	
733LA0PPPKK	EN 362/B EN 12275/B UIAA	Alu alloy	Keylock	Polished	30	10	10	70	Asymmetric	110	62.5	11	/	19	Screw	
733LA0NNNKK	EN 362/B EN 12275/B UIAA	Alu alloy	Keylock	Black	30	10	10	70	Asymmetric	110	62.5	11	/	19	Screw	
733LA0DCPKK	EN 362/B EN 12275/B UIAA	Alu alloy	Keylock	Grey/Yellow/Polished	30	10	10	70	Asymmetric	110	62.5	11	/	19	Screw	1

HMS CLASSIC AUTO BLOCK





ALUMINUM CARABINER | AUTO BLOCK SYSTEM

Aluminium connector with 3 actions Auto Block sleeve and Keylock system. The classic wide pear shape makes it suitable for belay with clove hitch. Can be used with all anchoring and belaying systems. Automatic sleeve makes it suitable for professional use.

Equipped with Keylock system that prevents any snagging with the rope and in the bolts. High quality product completely developed and produced in Italy. Tested piece by piece.

Usage activities

MOUNTAINEERING	OUNTAINEERING CANYO			i	SCAFFOLDING AND TRESTELS						
ROOF AND INCLINED F	PLANES	ROPE	ACCESS	CESS CONFINED SPACES							
LADDERS AND ELEVAT	ING PLAT	FORMS	SAILBO	ATS	TREECLIMBIN	G / ARBORICULTURE					
FIREBRIGADES AND C	IVIL PRO	TECTION	TACTIO	CAL							

Item	Standards	Material	2	Colour	∢► (kN)	♦ (kN)	(kN)	4i) (g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve	Features
786MM0NNNKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Black	22	8	1	95	H.M.S	116	78	12	/	23	Auto block	/
786MM0DPBKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Grey/Polished/Cyan	22	8	/	95	H.M.S	116	78	12	1	23	Auto block	
786MM0OPNKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Orange/Black	22	8	/	95	H.M.S	116	78	12	1	23	Auto block	
786MM0RPPKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Red/polished/polished	22	8	/	95	H.M.S	116	78	12	1	23	Auto block	

HMS CLASSIC SCREW SLEEVE





ALUMINUM ALLOY | SCREW SLEEVE | WIDE PEAR SHAPE

Aluminium connector with screw sleeve and Keylock system. The classic wide pear shape makes it suitable for belay with clove hitch. Can be used with all anchoring and belaying systems. Screw sleeve makes it suitable for professional use

Equipped with Keylock system that prevents any snagging with the rope and in the bolts. High quality product completely developed and produced in Italy. Tested piece by piece.

Usage activities

CLIMBING	MOUN	NTAINEERING		CANYONING	CAVING	3	SNOW &	ICE				
SCAFFOLDIN	G AND T	RESTELS	ROOF	AND INCLINED	PLANES	N	IETAL STRU	CTURES	ROPE ACCESS			
CONFINED SE	PACES	LADDERS A	ND E	ELEVATING PLAT	FORMS	SA	SAILBOATS					
TREECLIMBIN	NG / ARB	ORICULTURE	(CABLEWAY EVAC	CUATION		FIREBRIGA	DES AND	CIVIL PROTECTION			
HELIRESCUE	МО	UNTAIN RESC	UE	TACTICAL								

Item	Standards	Material	2	Colour	∢► (kN)	♦ (kN)	(kN)	4i\ (g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve
786MA0PPPKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Polished	22	8	6	88	H.M.S	116	78	12	1	25	Screw
786MA0RNPKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Red/Black/Polished	22	8	6	88	H.M.S	116	78	12	1	25	Screw
786MA0NNNKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Black	22	8	6	88	H.M.S	116	78	12	1	25	Screw
786MA0DBDKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Grey/Cyan/Grey	22	8	6	88	H.M.S	116	78	12	1	25	Screw
786MA0ONOKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Orange/Black/Orange	22	8	6	88	H.M.S	116	78	12	/	25	Screw

HMS CLASSIC TWIST LOCK





ALUMINUM CARABINER | TWIST LOCK SYSTEM

Aluminium connector with 2 actions Twist Lock sleeve and Keylock system. The classic wide pear shape makes it suitable for belay with clove hitch. Can be used with all anchoring and belaying systems. Automatic sleeve makes it suitable for professional use.

Equipped with Keylock system that prevents any snagging with the rope and in the bolts. High quality product completely developed and produced in Italy. Tested piece by piece.

Usage activities

CLIMBING	- 1	MOUNTAINEERING		SCAFFOLD	ING AND TRESTELS	ROOF	AN	ID INCLINED PLA	NES
ROPE ACCES	SS	CONFINED SPACE	S	LADDER	S AND ELEVATING P	LATFORMS	3	SAILBOATS	
TREECLIMBI	TREECLIMBING / ARBORICULTURE								

Item	Standards	Material	2	Colour	∢► (kN)	♦ (kN)	(kN)	(g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve
786MG0PPPKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Polished	22	8	1	95	H.M.S	116	78	12	/	23	Twist lock
786MG0RPPKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Red/Polished/Polished	22	8	1	95	H.M.S	116	78	12	/	23	Twist lock
786MG0NNNKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Black	22	8	1	95	H.M.S	116	78	12	/	23	Twist lock
786MG0DPBKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Grey/Polish/Cyan	22	8	1	95	H.M.S	116	78	12	/	23	Twist lock
786MG0OPNKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Orange/Black	22	8	/	95	H.M.S	116	78	12	/	23	Twist lock

HMS NAPIK SCREW SLEEVE





ALUMINUM CARABINER | SCREW SLEEVE

Aluminium connector with screw sleeve and Keylock system. The classic wide pear shape makes it suitable for belay with clove hitch. Can be used with all anchoring and belaying systems. Screw sleeve makes it suitable for professional use.

More compact and lighter than the traditional HMS and with a higher tensile strength.

Equipped with Keylock system that prevents any snagging with the rope and in the bolts.

High quality product completely developed and produced in Italy.

Tested piece by piece.

Usage activities

CLIMBING	MOUNTAIN	EERING	CANYONING	CAVING	SNOW & ICE	
SCAFFOLDIN	IG AND TREST	ELS ROC	OF AND INCLINED	PLANES	ROPE ACCESS	CONFINED SPACES
LADDERS AN	ID ELEVATING	PLATFORMS	SAILBOATS	TREECL	IMBING / ARBORI	CULTURE
CABLEWAY E	EVACUATION	FIREBR	IGADES AND CIVII	PROTECTIO	ON HELIRESC	UE
MOUNTAIN R	RESCUE	ACTICAL				

Item	Standards	Material	2	Colour	∢► (kN)	♦ (kN)	\mathbf{O} (kN)	4≜\ (g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve
787MA0NNNKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Black	23	10	6	80	H.M.S	110	71.5	12	1	23	Screw
787MA0BDBKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Cyan/Grey/Cyan	23	10	6	80	H.M.S	110	71.5	12	/	23	Screw
787MA0ONOKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Orange/Black/Orange	23	10	6	80	H.M.S	110	71.5	12	/	23	Screw
787MA0PPPKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Polished	23	10	6	80	H.M.S	110	71.5	12	1	23	Screw

HMS NAPIK AUTO BLOCK





ALUMINUM ALLOY | AUTO BLOCK SLEEVE | COMPACT HMS

Aluminium connector with 3 actions Auto Block sleeve and Keylock system. The classic wide pear shape makes it suitable for belay with clove hitch. Can be used with all anchoring and belaying systems. Automatic sleeve makes it suitable for professional use.

More compact and lighter than the traditional HMS and with a higher tensile strength. Equipped with Keylock system that prevents any snagging with the rope and in the bolts. High quality product completely developed and produced in Italy. Tested piece by piece.

Available in version with bar.

Usage activities

CLIMBING	MOUNTAINEERI	NG	CANYONI	NG	CAVING	S	CAFFOLDING	AND TRESTE	LS
ROOF AND IN	ICLINED PLANES	ROPE	ACCESS	COI	NFINED SPAC	CES			
LADDERS AN	D ELEVATING PLAT	FORMS	SAILBO	DATS	CABLEWA	AY EV	ACUATION		
FIREBRIGADI	ES AND CIVIL PROT	TECTION	TACTION	CAL					

Item	Standards	Material	1	Colour	∢► (kN)	♦ (kN)	(kN)	(g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve	Features
787MM0NNNKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Black/Black/Black	23	8	1	85	H.M.S	110	71.5	12	/	22.5	Auto block	1
787MM0BDBKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Cyan/Polished/Grey	23	8	1	85	H.M.S	110	71.5	12	/	22.5	Auto block	1
787MM0OPNKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Orange/Polish/Black	23	8	/	85	H.M.S	110	71.5	12	/	22.5	Auto block	1
787MM0RPPKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Red/Polished/Polished	23	8	1	85	H.M.S	110	71.5	12	/	22.5	Auto block	1
787MMKOPNKK	EN 12275 UIAA EN 362/T	Alu alloy	Keylock	Orange/Polish/Black	23	8	1	85	H.M.S	110	71.5	12	/	22.5	Auto block	Bar

LARGE MULTIUSE TWIST LOCK





ALUMINUM CARABINER | TWIST LOCK SYSTEM

Light alloy carabiner with wide opening. The particular D shape prevents the rotation of the carabiner and allows to distribute the load along the major axis.

Equipped with Keylock system that prevents any snagging on the rope and in the bolts.

Fitted with Twist Lock sleeve, easy to handle even wearing gloves.

2 movements: to open the carabiner turn the sleeve and pull the gate.

High quality product completely developed and produced in Italy.

Tested piece by piece.

Usage activities

CLIMBING MOL	NTAINEERING	CANYONING	SNOW	/ & ICE	SCA	FFOLDING AND TRESTELS
ROOF AND INCLINED	PLANES	METAL STRUCTURES	ROPE	E ACCESS	C	ABLEWAY EVACUATION
CONFINED SPACES	LADDERS	AND ELEVATING PLAT	FORMS	SAILBO	DATS	
TREECLIMBING / AR	BORICULTURE	TACTICAL				

Item	Standards	Material	2	Colour	∢► (kN)	♦ (kN)	(kN)	(g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve
737LG0NPNKK	EN 362/B UIAA EN 12275/B/K	Alu alloy	Keylock	Black/Polished/Black	27	8	9	78	Asymmetric	112	72	11	/	22	Twist lock
737LG0PPPKK	EN 362/B UIAA EN 12275/B/K	Alu alloy	Keylock	Polished	27	8	9	78	Asymmetric	112	72	11	/	22	Twist lock
737LG0DPQKK	EN 362/B UIAA EN 12275/B/K	Alu alloy	Keylock	Grey/Cyan	27	8	9	78	Asymmetric	112	72	11	/	22	Twist lock
737LG0QPPKK	EN 362/B UIAA EN 12275/B/K	Alu alloy	Keylock	Blue/Polish	27	8	9	78	Asymmetric	112	72	11	/	22	Twist lock
737RPP3P1KK	EN 362/B UIAA EN 12275/B/K	Alu alloy	Keylock	Red/Polish	27	8	9	78	Asymmetric	112	72	11	/	22	Twist lock

LARGE MULTIUSE SCREW SLEEVE





ALUMINUM ALLOY | SCREW SLEEVE | WIDE OPENING

Light alloy carabiner with straight gate and wide opening. The particular D shape prevents the rotation of the carabiner and allows to distribute the load along the major axis.

Equipped with Keylock system that prevents any snagging on the rope and in the bolts.

Fitted with screw sleeve, easy to handle even wearing gloves.

High quality product completely developed and produced in Italy.

Tested piece by piece.

Usage activities

CLIMBING MOU	NTAINEERING	CANYONI	NG	SCAFF	OLDING AN	ID TRESTELS	
ROOF AND INCLINED	PLANES	METAL STRUCTU	JRES	ROPE	ACCESS	CABLEWAY	EVACUATION
CONFINED SPACES	LADDERS	AND ELEVATING	PLATE	ORMS	SAILBOA	TS	
TREECLIMBING / ARI	BORICULTURI	TACTICAL					

Item	Standards	Material	1	Colour	∢► (kN)	♦ (kN)	(kN)	(g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve
737LA0NNNKK	EN 362/B UIAA EN 12275/B/H	Alu alloy	Keylock	Black	27	9	9	73	Asymmetric	112	72	11	1	23	Screw
737LA0PPPKK	EN 362/B UIAA EN 12275/B/H	Alu alloy	Keylock	Polished	27	9	9	73	Asymmetric	112	72	11	/	23	Screw
737LA0QNPKK	EN 362/B UIAA EN 12275/B/H	Alu alloy	Keylock	Blue/Black/Polished	27	9	9	73	Asymmetric	112	72	11	/	23	Screw
737LA0RNPKK	EN 362/B UIAA EN 12275/B/H	Alu alloy	Keylock	Red/Black/Polished	27	9	9	73	Asymmetric	112	72	11	1	23	Screw

OVAL ALU CLASSIC SCREW SLEEVE





ALUMINUM ALLOY | SCREW SLEEVE | OVAL SHAPE

Oval aluminium carabiner with a circular section which makes it recommended for use with mobile devices (pulleys, blockers, fall arresters ...).

Equipped with screw sleeve which makes it also suitable for professional applications.

Keylock system that prevents any accidental entanglement in rope or anchor point.

High quality product completely developed and produced in Italy.

Tested piece by piece.

Usage activities

SCAFFOLDING AND TRESTELS ROOF AND INCLINED PLANES ROPE ACCESS CONFINED SPACES LADDERS AND ELEVATING PLATFORMS SAILBOATS TREECLIMBING / ARBORICULTURE FIREBRIGADES AND CIVIL PROTECTION HELIRESCUE MOUNTAIN RESCUE TACTICAL	CLIMBING	MOUNTAINEERI	NG	CANYONING	CAVING	9	SNOW & ICE		
	SCAFFOLDIN	G AND TRESTELS	ROOF	AND INCLINED F	LANES	R	OPE ACCESS	CONFINED	SPACES
EIDERDICADES AND CIVIL PROTECTION. HELIDESCHE, MOLINTAIN RESCHE, TACTICAL	LADDERS AN	D ELEVATING PLAT	FORMS	SAILBOATS	TREE	CLIM	IBING / ARBOR	ICULTURE	
FIREBRIGADES AND CIVIL PROTECTION RELIRESCOE MOUNTAIN RESCOE TACTICAL	FIREBRIGADI	ES AND CIVIL PROT	TECTION	HELIRESCUE	MOL	JNT	AIN RESCUE	TACTICAL	

Item	Standards	Material	1	Colour	∢⊳ (kN)	♦ (kN)	(kN)	4i\ (g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve
730LA0BPPKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Cyan/Polished/Polished	22	7	7	65	Oval	105	54	11	/	16	Screw
730LA0PPPKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Polished	22	7	7	65	Oval	105	54	11	/	16	Screw
730LA0RPPKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Red/Polished/Polished	22	7	7	65	Oval	105	54	11	/	16	Screw
730LA0NNNKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Black	22	7	7	65	Oval	105	54	11	/	16	Screw
730LA0ONOKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Orange/Black/Orange	22	7	7	65	Oval	105	54	11	/	16	Screw

I-OVALONE ALU AUTO BLOCK





I-CONNECTOR | CONNECTOR WITH INTEGRATED NFC CHIP

New connector equipped with NFC drip that brings the history of your device always at your fingertips. No expensive readers required. Readable with a common martphone or PC.

This solution provides aneasier and faster periodic inspection process, avoiding dangerous mistakes made during the serial number transcription.

Compatible with any inspection software.

Patented system.

Standard version, without chip, also available

Oval aluminum carabiner with large opening.

Key features:

- Autoblock sleeve (3 movements): to open the carabiner must lift the sleeve, rotate it, and then pull the lever
- System Keylock
- High quality product entirely developed and manufactured in Italy
- Tested piece by piece

Also available with the newECO finish obtained by totally removing heavy chemical treatments. *Think green, preserve the planet!*



NFC READY

Usage activities

MOUNTAINEERING	SNOW & ICE	SCAFFOLDING	AND TRESTELS	ROOF AND INCLINE	D PLANES
METAL STRUCTURES	ROPE ACCESS	CABLEWAY E	EVACUATION	CONFINED SPACES	
LADDERS AND ELEVAT	ING PLATFORMS	SAILBOATS	TREECLIMBI	NG / ARBORICULTURE	
CABLEWAY EVACUATION	ON FIREBRIC	SADES AND CIVIL	PROTECTION	MOUNTAIN RESCUE	
TACTICAL					

Item	Standards	Material	1	Colour	∢► (kN)	♦ (kN)	(kN)	4i\ (g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve	Features
712LM1NNNKK	EN 362/B EN 12275/B UIAA	Alu alloy	Keylock	Black	26	9	1	76	Oval	110	62.6	/	/	21	Auto Block NFC	/
712LM1FFFKK	EN 362/B EN 12275/B UIAA	Alu alloy	Keylock	Titanium	26	9	1	76	Oval	110	62.6	/	1	21	Auto Block NFC	1
712LM1LLLKK	EN 362/B EN 12275/B UIAA	Alu alloy	Keylock	Eco	26	9	/	76	Oval	110	62.6	/	/	21	Auto Block NFC	/

I-OVALONE ALU TWIST LOCK





I-CONNECTOR | CONNECTOR WITH INTEGRATED NFC CHIP

New connector equipped with NFC chip that brings the history of your device always at your fingertips. No expensive readers required. Readable with a common martphone or PC.

This solution provides aneasier and faster periodic inspection process, avoiding dangerous mistakes made during the serial number transcription.

Compatible with any inspection software.

Patented system.

Oval aluminum carabiner with large opening.

Key features:

- Twist lock sleeve (2 movements): to open the carabiner turn the sleeve and pull.
- System keylock
- High quality product entirely developed and manufactured in Italy
- Tested piece by piece

Also available with the new ECO finish obtained by totally removing heavy chemical treatments. *Think green, preserve the planet!*



NFC READY

Usage activities

MOUNTAINEERING	CAVING	SC	AFFOLDING AND TRESTELS	ROOF	AND INCLINED PLA	NES
METAL STRUCTURES	ROPE ACC	CESS	CABLEWAY EVACUATION	CON	FINED SPACES	
LADDERS AND ELEVAT	ING PLATFOR	RMS	TREECLIMBING / ARBORICU	ILTURE	CABLEWAY EVA	ACUATION
TACTICAL						

Item	Standards	Material	2	Colour	∢► (kN)	♦ (kN)	つ (kN)	(g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve
712LG1NNNKK	EN 362/B EN 12275/B UIAA	Alu alloy	Keylock	Black	26	9	/	76	Oval	110	62.6	/	1	21	Twist Lock NFC
712LG1FFFKK	EN 362/B EN 12275/B UIAA	Alu alloy	Keylock	Titanium	26	9	/	76	Oval	110	62.6	1	1	21	Twist Lock NFC
712LG1LLLKK	EN 362/B EN 12275/B UIAA	Alu alloy	Keylock	Eco	26	9	1	76	Oval	110	62.6	/	/	21	Twist Lock NFC

OVALONE ALU SCREW SLEEVE





ALU ALLOY | SCREW SLEEVE | LARGE OPENING

Oval aluminum carabiner with large opening. The wide symmetrical shape, greater than that of a classic oval, still allows a better positioning on mobile devices and their correct operation even if not perfectly aligned with the connector.

Key features:

- Screw sleeve
- System Keylock
- High quality product entirely developed and manufactured in Italy
- Tested piece by piece

Usage activities

MOU	UNTAINEERING	CANYONI	NG	CAVING		SNOW &	ICE	S	CAFFOLDING AND TRESTELS
ROC	OF AND INCLINED I	PLANES	META	L STRUCTURE	S	ROPE	ACCE	ESS	CABLEWAY EVACUATION
CON	NFINED SPACES	LADDERS	AND E	ELEVATING PLA	ATF	ORMS	SAII	LBOA	NTS .
TRE	EECLIMBING / ARB	ORICULTURE	(CABLEWAY EV	ACI	UATION	F	IREB	RIGADES AND CIVIL PROTECTION
MOU	UNTAIN RESCUE	TACTICAL	-						

Item	Standards	Material	2	Colour	∢► (kN)	▲ (kN)	(kN)	(g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve	Features
712LA0NNNKK	EN 362/B EN 12275/B UIAA	Alu alloy	Keylock	Black	26	12	8	72	Oval	110	62.6	1	/	21	Screw	1
712LA0ONOKK	EN 362/B EN 12275/B UIAA	Alu alloy	Keylock	Orange/Black/Orange	26	12	8	72	Oval	110	62.6	1	/	21	Screw	1
712LA0RNPKK	EN 362/B EN 12275/B UIAA	Alu alloy	Keylock	Red/black/polished	26	12	8	72	Oval	110	62.6	1	/	21	Screw	1
712LA0PPPKK	EN 362/B EN 12275/B UIAA	Alu alloy	Keylock	Polished	26	12	8	72	Oval	110	62.6	1	/	21	Screw	1

OVALONE ALU AUTO BLOCK





Oval aluminum carabiner with large opening.

Key features:

- Autoblock sleeve (3 movements): to open the carabiner must lift the sleeve, rotate it, and then pull the lever
- System Keylock
- High quality product entirely developed and manufactured in Italy
- Tested piece by piece

Usage activities

MOUNTAINEERING	SNOW & ICE	SCAFFOLDING	AND TRESTELS	ROOF AND INCLINED	D PLANES
METAL STRUCTURES	ROPE ACCESS	CABLEWAY E	VACUATION	CONFINED SPACES	
LADDERS AND ELEVAT	ING PLATFORMS	SAILBOATS	TREECLIMBI	NG / ARBORICULTURE	
CABLEWAY EVACUATION	ON FIREBRIG	ADES AND CIVIL	PROTECTION	MOUNTAIN RESCUE	
TACTICAL					

Item	Standards	Material	2	Colour	∢► (kN)	♠ (kN)	(kN)	(g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve	Features
712LM0NNNKK	EN 362/B EN 12275/B UIAA	Alu alloy	Keylock	black/black/black	26	9	1	79	Oval	110	62.6	1	/	21	Auto block	1
712LM0OPNKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Orange/Polish/Black	26	9	1	79	Oval	110	62.6	/	/	21	Auto block	/
712LM0RPPKK	EN 362/B EN 12275/B UIAA	Alu alloy	Keylock	Red/polished/polished	26	9	1	79	Oval	110	62.6	1	/	21	Auto block	/
712LM0PPPKK	EN 362/B EN 12275/B	Alu alloy	Keylock	polished	26	9	/	79	Oval	110	62.6	1	1	21	Auto block	/

OVALONE ALU TWIST LOCK





Oval aluminum carabiner with large opening.

Key features:

- □ Twist lock sleeve (2 movements): to open the carabiner turn the sleeve and pull.
- System keylock
- High quality product entirely developed and manufactured in Italy
- Tested piece by piece

Usage activities

MOUNTAINEERING	CAVING	SC	AFFOLDING AND TRESTELS	ROOF A	ND INCLINED PL	ANES
METAL STRUCTURES	ROPE ACC	CESS	CABLEWAY EVACUATION	CONI	FINED SPACES	
LADDERS AND ELEVAT	ING PLATFOR	RMS	TREECLIMBING / ARBORICU	JLTURE	CABLEWAY E	VACUATION
TACTICAL						

Item	Standards	Material	1	Colour	∢► (kN)	♦ (kN)	(kN)	(g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve	Features
712LG0NNNKK	EN 362/B EN 12275/B UIAA	Alu alloy	Keylock	Nero	26	9	1	79	Oval	110	62.6	1	1	21	Twist lock	/
712LG0OPNKK	EN 362/B EN 12275/B UIAA	Alu alloy	Keylock	Orange/Polish/Black	26	9	1	79	Oval	110	62.6	1	/	21	Twist lock	1
712LG0RPPKK	EN 362/B EN 12275/B UIAA	Alu alloy	Keylock	red/polish/polish	26	9	1	79	Oval	110	62.6	/	/	21	Twist lock	/
712LG0PPPKK	EN 362/B EN 12275/B UIAA	Alu alloy	Keylock	polished	26	9	/	79	Oval	110	62.6	1	1	21	Twist lock	1

TANGO





ALUMINUM ALLOY | DOUBLE GATE | WIDE OPENING

Aluminum carabiner with double gate safety system. To open the carabiner push the rear gate with your palm while pulling the front gate with your fingers. The rear gate is protected in order to prevent accidental opening against the wall. Specifically conceived for use in via-ferrata sets and adventure parks lanyards.

Fitted with Keylock system.

High quality product, tested in Italy piece by piece.

Usage activities

FERRATA	MOUNTAINEE	ERING	C	ANYONING	А	DVENT	URE PARKS	SN	OW & ICE
SCAFFOLDIN	NG AND TRESTE	LS RO	OOF A	AND INCLINE	ED PLA	NES	ROPE ACCE	SS	
CABLEWAY I	EVACUATION	CONF	INED	SPACES	LADI	DERS A	ND ELEVATING	PLA	TFORMS
SAILBOATS	TREECLIME	ING / AR	BORI	CULTURE	CAE	BLEWA'	Y EVACUATION	1	
FIREBRIGAD	ES AND CIVIL P	ROTECTI	ION	HELIRES	CUE	MOL	INTAIN RESCL	JE	TACTICAL

Item	Standards	Material	2	Colour	∢► (kN)	♦ (kN)	(kN)	(g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve	Features
7150X0NNNKK	EN 12275/K UIAA EN 362/T	Alu alloy	Keylock	Black	33	10	15	130	Special	136	70	/	19	26	Double gate	/
7150X0BNNKK	EN 12275/K UIAA EN 362/T	Alu alloy	Keylock	Cyan/Black	33	10	15	130	Special	136	70	/	19	26	Double gate	/
7150X0ONNKK	EN 12275/K UIAA EN 362/T	Alu alloy	Keylock	Orange/Black	33	10	15	130	Special	136	70	1	19	26	Double gate	/
7150X0QPPKK	EN 12275/K UIAA EN 362/T	Alu alloy	Keylock	Blue/Polished	33	10	15	130	Special	136	70	1	19	26	Double gate	1
7150X0RPPKK	EN 12275/K UIAA EN 362/T	Alu alloy	Keylock	Red/Polished	33	10	15	130	Special	136	70	/	19	26	Double gate	/

X-LARGE ALU AUTO BLOCK





Light alloy carabiner with Auto Block sleeve. The X-Large is designed to offer a wide gate opening and a high tensile strength. The particular D shape prevents the rotation of the carabiner and allows to distribute the load along the major axis.

Equipped with Keylock system that prevents any snagging on the rope and in the bolts.

Fitted with Auto Block sleeve, easy to open even wearing gloves.

3 movements sleeve: to open the connector it is necessary to lift the sleeve, turn it and then pull the gate.

High quality product completely developed and produced in Italy.

Tested piece by piece.

Usage activities

MOUNTAINEERI	MOUNTAINEERING CANYONING		3	SCAFFO	LDING AND TRESTELS	ROOF AND INCLINED PLANES			
ROPE ACCESS	CO	NFINED SPACE	ES	LADDER	S AND ELEVATING PLAT	FORMS	SAILBOATS		
TREECLIMBING	/ ARB	ORICULTURE	Т	ACTICAL					

Item	Standards	Material	1	Colour	∢► (kN)	♠ (kN)	(kN)	(g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve	Features
711MM0NNNKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Black/Black/Black	30	8	1	95	Asymmetric	114	76.5	12	/	26	Auto block	/
711MM0OPNKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Orange/Polish/Black	30	8	/	95	Asymmetric	114	76.5	12	/	26	Auto block	/
711MM0RPPKK	EN 362/B EN 12275/B UIAA	Alu alloy	Keylock	Red/Polished/Polished	30	8	1	95	Asymmetric	114	76.5	12	/	26	Auto block	/
711MM0QPNKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Blu/Lucido/Nero	30	8	/	95	Asymmetric	114	76.5	12	/	26	Auto block	/
711MM0PPPKK	EN 362/B EN 12275/B UJAA	Alu alloy	Keylock	Polished	30	8	/	95	Asymmetric	114	76.5	12	/	26	Auto block	1

X-LARGE ALU TWIST LOCK





Aluminium carabiner with Twist Lock sleeve. The X-Large is designed to offer a wide gate opening and a high tensile strength. The particular D shape prevents the rotation of the carabiner and allows to distribute the load along the major axis.

Equipped with Keylock system that prevents any snagging on the rope and in the bolts.

Fitted with Twist Lock sleeve, easy to open even wearing gloves.

2 movements sleeve: to open the connector it is necessary to turn the sleeve and pull the gate.

High quality product completely developed and produced in Italy.

Tested piece by piece.

Available in version with bar.

Usage activities

MOUNTAINEERI	MOUNTAINEERING CANYONING		3	SCAFFO	LDING AND TRESTELS	ROOF	AND INCLINED I	PLANES
ROPE ACCESS	CO	NFINED SPACE	S	LADDER	S AND ELEVATING PLA	FORMS	SAILBOATS	
TREECLIMBING	/ ARB	ORICULTURE	Т	ACTICAL				

Item	Standards	Material	1	Colour	∢► (kN)	♦ (kN)	$\mathbf{O}(kN)$	41) (g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve	Features
711MG0NNNKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Black/Black/Black	30	8	1	95	Asymmetric	114	76.5	12	/	26	Twist lock	1
711MG0OPNKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Orange/Polish/Black	30	8	1	95	Asymmetric	114	76.5	12	/	26	Twist lock	1
711MG0RPPKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Red/Polish/Polish	30	8	1	95	Asymmetric	114	76.5	12	/	26	Twist lock	1
711MGKOPNKK	EN 12275 UIAA EN 362/T	Alu alloy	Keylock	Orange/Polish/Black	30	8	1	95	Asymmetric	114	76.5	12	1	26	Twist lock	Bar

X-LARGE ALU SCREW SLEEVE





Light alloy carabiner with screw sleeve. The X-Large is designed to offer a wide gate opening and a high tensile strength. The particular D shape prevents the rotation of the carabiner and allows to distribute the load along the major axis.

Equipped with Keylock system that prevents any snagging on the rope and in the bolts.

Fitted with screw sleeve, easy to open even wearing gloves.

High quality product completely developed and produced in Italy.

Tested piece by piece.

Usage activities

MOUNTAINEERING	CANYO	ONING	CAVING	:	SCAFFOLI	DING AN	ND TRES	STELS
ROOF AND INCLINED	ROOF AND INCLINED PLANES ROPE			CCESS CONFINED SPACES				
LADDERS AND ELEVA	LADDERS AND ELEVATING PLATFORMS			SAILBOATS TREEC			G / ARB	ORICULTURE
FIREBRIGADES AND C	FIREBRIGADES AND CIVIL PROTECTION			TAIN R	ESCUE	TAC	ΓICAL	

Item	Standards	Material	1	Colour	∢► (kN)	♠ (kN)	(kN)	4i (g)	Shape	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Sleeve
711MA0PPPKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Polished	30	8	10	90	Asymmetric	114	76.5	12	1	27	Screw
711MA0RDPKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Red/Titanium/Polished	30	8	10	90	Asymmetric	114	76.5	12	/	27	Screw
711MA0NNNKK	EN 12275 EN 362/B UIAA	Alu alloy	Keylock	Black	30	8	10	90	Asymmetric	114	76.5	12	/	27	Screw
711MA0ONOKK	EN 12275 EN 362/B	Alu alloy	Keylock	Orange/Black/Orange	30	8	10	90	Asymmetric	114	76.5	12	/	27	Screw

QUICKDRAWS

ERGO TACTICAL QUICKDRAW





QUICKDRAW FOR SPORT CLIMBING

The Express Ergo quickdraw is equipped with two Ergo connectors, a straight gate connector on top and a bent gate connector on bottom.

Nylon sling.

Length: 12cm and 16cm.

High quality product completely developed and produced in Italy.

Tested piece by piece.

The black color is particularly appreciated for all uses where the equipment must be not very visible (military use, theater and cinema, acrobatic shows, etc ...).

Usage activities

CLIMBING MOUNTAINEERING TACTICAL

Item	C € EN	Material	Colour	(g)	Webbing length (mm)	Notes
761SET35N0K	EN 12275	Alu alloy	Black	120	1	/

CONVOY





EQUIPMENT BAG

Equipment bag fitted with pockets and compartments to hold your equipment in a practical and efficient way.

Once laid on the ground, it opens up completely, allowing you to easily locate material, keep it organized and ready for use.

The compact and elongated shape makes it easy to carry on the shoulders, while guaranteeing a large internal capacity.

External features:

- Made of high strength and cut resistant fabric
- Waterproof and removable PVC flap that hides and protects the shoulder straps when not in use
- External top hood pocket is easily accessible
- Can be comfortably carried using the concealable shoulder straps and padded back
- Portable by hand using the two large reinforced handles
- Can be hoisted in a vertical position using the specific loop
- Velcro closure and safety buckles prevent accidental opening
- Heavy-duty zips with additional press-stud safety closure
- ID badge pocket
- Plastic buckles for fixing the optional helmet holder accessory #982004N00KK

Internal features:

- 5 large mesh pockets with Velcro closure
- 24 attachment points for connectors
- 2 straps with adjustable buckles for fixing the rope, or the optional rope holder accessory #982003N00KK
- Transparent pocket for documents

Optional accessories:

- 19l Rope bag (holds 100m of 10.5mm diameter rope) #982003N00KK
- Helmet holder made of elastic webbing #982004N00KK

High quality product made in Italy.

Please note: equipment is not included

Usage activities

MOUNTAINEERING	SC	AFFOLDING A	ND TRESTELS	ROOF AND IN	ICLINED PLANES			
METAL STRUCTURES	R	OPE ACCESS	CABLEWAY	EVACUATION	CONFINED SPACES			
LADDERS AND ELEVAT	ING F	PLATFORMS	SAILBOATS TREECLIMBING / ARBORICUL					
CABLEWAY EVACUATION	NC	FIREBRIGA	DES AND CIVIL	PROTECTION	HELIRESCUE			
MOUNTAIN RESCUE	TA	CTICAL						

Item	(g)	Capacity (I)	Material	Notes
982002N00KK	2600	56	PVC Nylon	/
982003N00KK	450	19	PVC Nylon	1
982004N00KK	70	1	Nylon	/

OMNIBAG





- Bag for carrying ropes and equipment, with concealable, comfortable padded shoulder straps and removable wide lumbar support.
- Haul loops of different lengths for barycentric suspension.
- Wide opening for convenient access to the bag's contents.
- Inner roll closure with aluminium buckle and external drawstring closure.
- Side opening equipped with an ultra-resistant size 10 nylon zip with a protective anti-rubbing flap and an automatic button that prevents accidental opening.
- Rear identification label
- Rear loop for suspension
- Transparent side pocket to hold an identification tag.
- Internal removable pocket with zipper and textile loops for storing the smallest of tools.
- Made of extremely durable PVC.
- Reinforced bottom with wear-resistant edge.
- Double seams at the points of greatest stress.
- 50L capacity which is expandable to 60L.

Optional: 5 mm thick bottom pad #982524011KK made in EPE (expanded polyethylene) with a rigid insert on the outer bottom made in polypropylene, which:

- Stiffens the bottom to guarantee the stability of the bag
- Protects the bottom from sharp objects that could damage it, such as drill bits, blades, ice axes, avalanche probes, etc.
- Can be used in emergency as a bowl of water for pets or as a container for small objects

Height 55 cm (plus extension 20cm)

Width 33 cm

Depth 25 cm

Usage activities

CLIMBING	MOUNTAINEER	C	CAVING	SN	OW & ICE	SCA	FFOLDING AND TRESTELS	
ROOF AND IN	INCLINED PLANES MI			STRUCTUR	ROPE A	CCESS	CABLEWAY EVACUATION	
TREECLIMBIN	TREECLIMBING / ARBORICULTURE			ABLEWAY E	VACI	UATION	FIREB	RIGADES AND CIVIL PROTECTION
HELIRESCUE	MOUNTAIN RI	SCUE	Ε	TACTICAL	L			

Item	(9)	Capacity (I)	Material	Notes
982524N01KK	1300	60	PVC	/

GENIUS II





HAULING BAG | WIDE OPENING | SUSPENSION LOOPS

New version more practical and stronger.

Fitted with reinforced loops for suspension, one rear and one upper.

Double closure with drawstring.

The comfortable and foldaway shoulder straps avoid any entanglement during lowering and recovery operations.

The oblique cut of the upper part allows to keep the bag open through the special hanging eyelet. Fitted with practical inner pockets.

Capacity: 30 liters

Usage activities

CLIMBING	MOUNTAINEERING	CAVING	SNOW & ICE	TACTICAL
----------	----------------	--------	------------	----------

Item	₫▶ (g)	Capacity (I)	Material	Notes
982534N01KK	850	30	PVC	

ROPE BAG





AVAILABLE IN TWO SIZES | 28 AND 43 LITERS

Backpack for carrying ropes and equipment with comfortable padded shoulder straps and hook for suspension.

Angled closing flap with ring for the suspension which ensure a comfortable access to the contents of the bag.

Drawstring closure and rapid clip made of ultra-durable nylon.

Transparent side pocket for name plate label.

Interior pocket with zip for storing small tools.

Made of extremely durable PVC; reinforced bottom with slotted holes for breathability and handle for the emptying.

Available in two sizes:

- Capacity 28 liters, can hold a 100 m Ø 11 mm rope.
- Capacity 43 liters, can hold a 200 m Ø 11 mm rope.

Usage activities

CLIMBING	NOM	NTAINEERIN	G	CAVING	SC	CAFFOLD	ING AND TI	RESTE	ELS	
ROOF AND IN	CLINED	PLANES	MET	AL STRUCTU	RES	ROPE	ACCESS	CA	BLEWAY EVACUATIO	N
CONFINED SE	PACES	LADDERS	SAND	ELEVATING F	PLATI	FORMS	SAILBOA	ATS		
TREECLIMBIN	NG / ARB	ORICULTUR	E	CABLEWAY I	EVAC	CUATION	FIREB	RIGA	DES AND CIVIL PROT	ECTION
HELIRESCUE	МО	UNTAIN RES	CUE	TACTICA	L					

Item	(g)	Capacity (I)	Material	Notes
982501N01KK	700	28	PVC	
982502N01KK	800	43	PVC	

TALKIE BAG





Radio bag easily applicable to the harness by Velcro band.

The lateral elastic sides allow to adapt to different sizes of radios.

Adjustable closure with metal buckle.

The shape of the upper part allows the radio antenna and/or the earphone cable to come out from both sides.

Usage activities

SCAFFOLDING	G AND TRESTE	LS ROOF A	AND INCLIN	ED PLA	NES	METAL STRUCT	URES	ROPE	ACCESS
CABLEWAY E	VACUATION	CONFINED	SPACES	LADD	ERS A	ND ELEVATING PL	ATFORM	S	
SAILBOATS	TREECLIMB	ING / ARBORI	ICULTURE	CAB	LEWA	Y EVACUATION			
FIREBRIGADE	ES AND CIVIL P	ROTECTION	HELIRES	SCUE	MOL	JNTAIN RESCUE	TACT	ICAL	

Item	∢i> (g)	Capacity (I)	Material
982010000KK	50	/	Nylon

TUBE





Ultra-light rope bag.

It can be used alone or as an accessory bag to fit into a bigger backpack.

It can hold up to 60m of 11mm diameter rope.

Equipped with handy loops for tying-in the rope ends.

The upper opening features a rigid cable that holds it in the open position, making it easy to feed rope in and out of the bag.

Writeable label for quick owner identification.

Usage activities

	CLIMBING	MOUNTAINEERING	CANYONING	CAVING	SNOW & ICE	TACTICAL
--	----------	----------------	-----------	--------	------------	----------

Item	₫▶ (g)	Capacity (I)	Material
982525000KK	155	17	Nylon

ACCESSORY CORD

ARAMIDIC CORE ROPE





6mm rope with aramidic core andpolyamide sheath, the best compromise between grip and resistance to high temperatures.

Packagedin rolls of 50 meters Weight 22,9 g/m

Conform to CE EN 564

Usage activities

MOUNTAINEERING	CAVING	FIREBRIGADES AND CIVIL PROTECTION	TACTICAL
----------------	--------	-----------------------------------	----------

Item	C€ EN	Туре	Diameter (mm)	Lenght (m)	Colour	Material	Weight (g/m)	Number of falls	Sheath slippage	Elongation (%)	♦ (kN)
9A060A1S050	EN 564	Accessory cord	6	50	Black	Aramid/PA	22.9	1	/	/	/

ROPES ACCESSORIES

PROTHOC





ROPE PROTECTION | CORDURA®

Very light tube made of strong Cordura® used as a protection of ropes against sharp edges.

Compared to the classic PVC protection, it has a significantly higher resistance and a lower weight.

The Velcro® closure allows the positioning around the rope in any point.

Fitted with a plastic ring to fix it avoiding slippage.

Available in two colors for immediate identification in case of simultaneous use of two ropes.

Usage activities

SCAFFOLDING AND T	RESTELS	ROOF AND INCLINED PLAN	IES	METAL	STRUCTURES	ROPE ACCESS
CONFINED SPACES	TREECL	IMBING / ARBORICULTURE	TA	CTICAL		

Item	Standards	Material	(g)	Notes	A (mm)
84601O400KK	1	Cordura	95	Orange	700
84601N400KK	/	Cordura	95	Black	700

POSITIONING

RESCUE TRIMMER+





System used for a precise positioning during rescue operations: the TRIMMER+ guarantees a millimetric and soft adjustment both in recovery and in release of the rope.

Equipped with an asymmetric Quick Link for a precise connection to the harness, with the minimum encumbrance.

Rope length 130 cm, suitable for all situations that require the connection to helicopter anchor points.

Bag dedicated both to the housing of the unused system and to containing the piece of rope that exceeds, without interfering with other equipment. The bag is equipped with a self-locking double-slider zip that allows the use on both sides of the harness. In addition, the bag fastening system, realised with a double loop with Velcro, allows positioning on harnesses with different belt heights.

Kit composed of:

- Trimmer+
- 130 cm length rope with sewed terminals and double gate connector mod. Tango
- Quick Link Asymmetric
- Dedicated bag



Usage activities

FIREBRIGADES AND CIVIL PROTECTION HELIRESCUE MOUNTAIN RESCUE TACTICAL

Item	Standards	∢► (kN)	Length (m)	4i\ (g)	Rope diameter (mm)	Length regulator	Note
289SETS08KK	EN 358	/	1,3	480	10	Yes	

YATES TACTICAL

ADJUSTABLE LANYARD W/SHOCK STOP 571







Yates Tactical adjustable positioning lanyard designed to connect to user's harness, to fixed surface or to anchoring point via unique aluminum connector Kong Tango.

The lanyard has an adjustable length using Yates adjustable daisy chain system.

Yates Screamershock absorber added for energy absorption.

Colours available: Terra and Black

Lanyard length: from 45 to 119 cm (18-47 inches)

This device is not suitable for private use, and it is specifically designed for use by the armed forces or in the maintenance of law and order.

Usage activities

TACTICAL

Item	NSN Code	Standards	4å ▶ (g)	Size	Colour	Length (cm)	Notes
9Y5710000YY	4240016416763	1	1	1	Black	45-119	1
9Y571T000YY	4240016416763	1	1	1	Terra	45-119	1

YATES TACTICAL

PERSONAL RETENTION LANYARD 572







Yates Tactical personal retention lanyard to be used in a helicopter. Unique Kong FROG quick-release mechanism on one end is designed to hook directly into helicopter floor rings.

The loop end is designed to girth hitch to user harness.

Lanyard rated strength 15kN (3400 lbf.)

Colours available: black and terra

Length retracted: 53 cm (21 inches)

Length fully extended: 81 cm (32 inches)

This device is not suitable for private use, and it is specifically designed for use by the armed forces or in the maintenance of law and order.

Usage activities

TACTICAL

Item	NSN Code	Standards	(g)	Size	Colour	Length (cm)	Notes
9Y5720000YY	1	/	1	/	Black	53-81 cm	/
9Y572T000YY	/	/	1	/	Terra	53-81 cm	/

YATES TACTICAL

QR PERSONAL RETENTION LANYARD563







Yates Tactical personal retention lanyard with quick-release shackle made of stainless steel.

Swedged release pin (New SOCOM requirement) eliminates plunger pin from releasing in the event the retaining ring is broken.

"New" Quick release shackle uses velcro to secure the release tab in place to lessen the chance of inadvertent release.

Lanyard rated strength 15kN.

Available in Terra and Black

Lanyard length: from 53 cm to 81 cm (21-32 inches)

Lanyard length extended with carabiner: 91 cm (36 inches)

This device is not suitable for private use, and it is specifically designed for use by the armed forces or in the maintenance of law and order.

Usage activities

TACTICAL

Item	NSN Code	Standards	(€)	Size	Colour	Length (cm)	Notes
9Y563DAITYY	4240016258219	1	1	/	Terra	53-81	1
9Y563BLACYY	4240016108970	1	/	/	Nero	53-81	1



